

Accessories for SCM5B Analog Modules

SCMPB01/SCMPB01-x

16-position Analog I/O Backpanel, Non-multiplexed

SECTION 1 - SCM5B

DESCRIPTION

The SCMPB01 16-channel backpanel (Figure 1, below) can accept any of the SCM5B analog modules in any mixture. It can be mounted on the SCMXRK-002 19-inch metal rack. The SCMPB01 has 16 non-addressable analog I/O signal channels which provides each module with its own analog bus. The module output switch is continuously “on” when using this backpanel and all sixteen module outputs are simultaneously accessible to high-speed data acquisition (ADC) boards. A set of inter-channel bridge jumpers permits connecting an input module’s output to an output module’s input, providing two levels of isolation. A temperature sensor is mounted on each channel to provide cold junction compensation for thermocouple-input modules (see Figure 2, below, for schematic). Field connections are terminated with four screw terminals at each module site. Use system interface cable SCMxca004-xx for connection to the host system.

Specifications

Operating Temperature	-40°C to +85°C
Relative Humidity	95% Noncondensing
Interface Connector:	
Field System	High-Density Screw Clamp, 14 AWG (max) 26-pin, Male Header Connector
Isolation:	
Input-to-Output	1500Vrms, Continuous, (max)
Channel-to-Channel	1500Vrms, Continuous, (max)

FEATURES

- 16-position Backpanels (1-(SCMPB03), 2-(SCMPB04), and 8-(SCMPB05)-position Also Available)
- Panel or DIN-rail Mounting Options
- 19-inch Mounting Rack for Backpanels
- Multiplexed and Non-Multiplexed Backpanels
- Interface Cables
- Module Evaluation Board
- Cable-to-Screw-Terminal Interface Board
- Power Supplies
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Easy Installation
- 16 Non-addressable Channels
- Continuous “ON” for High-speed (ADC) Simultaneous Data Acquisition
- Two-level Isolation Available


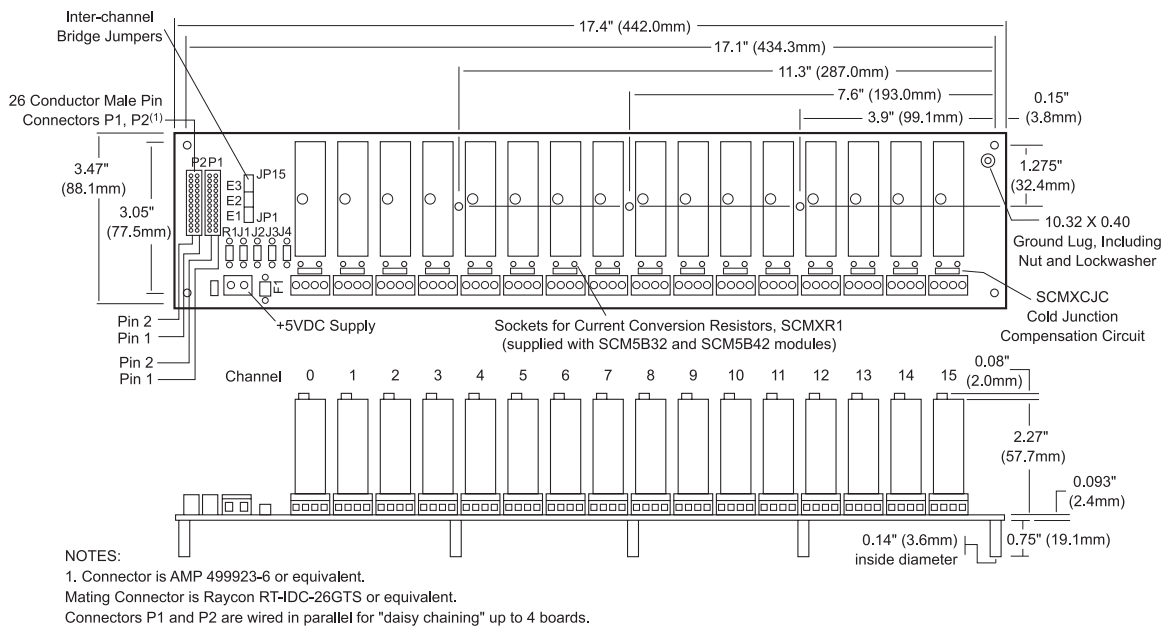


Figure 1: SCMPB01 Analog I/O Backpanel

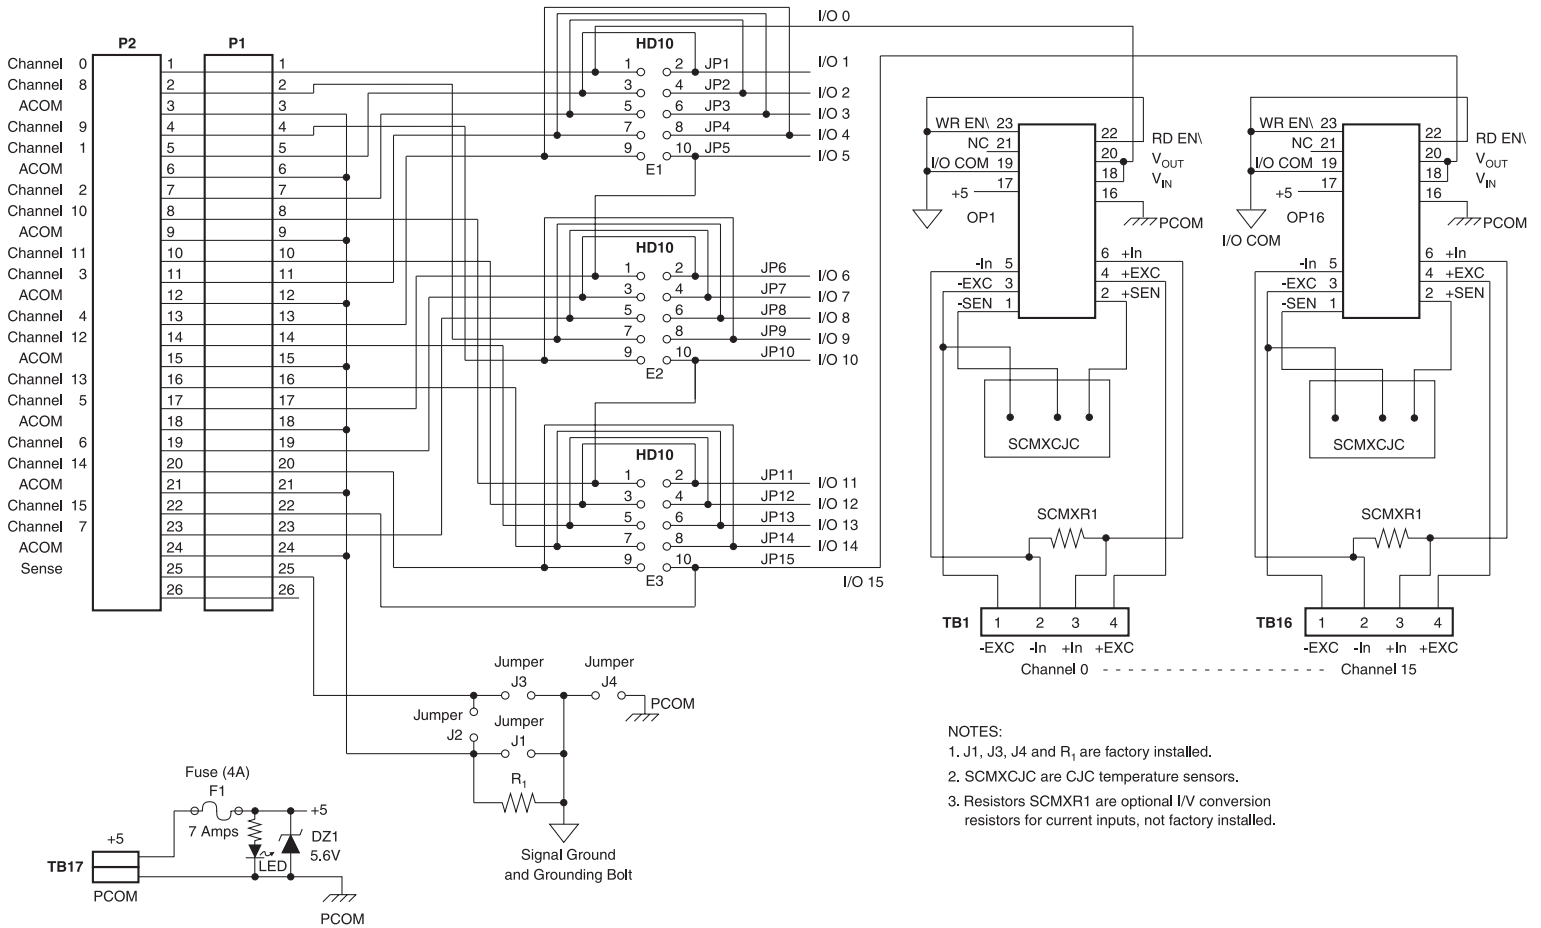

- NOTES:
1. J1, J3, J4 and R₁ are factory installed.
 2. SCMXCJC are CJC temperature sensors.
 3. Resistors SCMXR1 are optional I/V conversion resistors for current inputs, not factory installed.

Figure 2: SCMPB01 Schematic

Electrical

P1 and P2 Connectors

Connection to the host system is made at connectors P1 and P2. These connectors are electrically equivalent. Two connectors are provided to allow both analog input and analog output from host systems having individual input and output connectors.

Adjacent Channel Jumpers

Adjacent channels may be connected together to provide an isolated output signal from an isolated input module, providing two levels of 1500V isolation. This capability is provided with the 15 jumpers labeled JP1 through JP15 on headers E1, E2, and E3. A simplified drawing of the SCMPB01 schematic for Channels 1 through 4 is shown in Figure 3.

Example: Assume an SCM5B30 input module is installed in Channel 0 position and an SCM5B39 output module is installed in Channel 1 position. If JP1 is installed, the output of Channel 0 is connected to the input of Channel 1, which provides two levels of 1500V isolation.

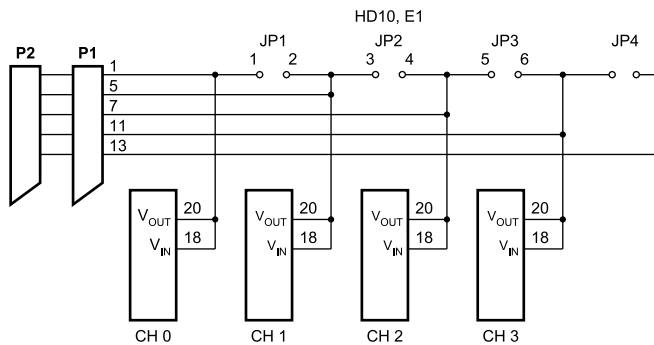


Figure 3: SCMPB01 Adjacent Channel Jumpers

Power

The SCMPB01/SCMPB01-x backpanel requires external +5VDC $\pm 5\%$ power. The chassis-mounted SCMPRE-003 or SCMPRT-003 power supplies have adequate capacity to power any combination of modules.

Fusing

The SCMPB01/SCMPB01-x backpanel power is fuse protected through F1. This is a Littelfuse type 252007, 7A fuse. Zener diode DZ1 provides extra protection by clamping the input power voltage to +5.6V. If the input supply voltage connection is reversed, this zener diode will be forward biased and fuse F1 will be blown.

Grounding

Figure 4 details the optional ground jumper configuration available on the SCMPB01/SCMPB01-x backpanel. Jumpers J1, J3, and J4 are factory installed.

Jumper J1 connects the AGND shield wires (pins 3, 6, 9, 12, 15, 18, 21, and 24) to the backpanel signal ground. This provides a ground connection between the host system and backpanel. Jumper J1 is required if output modules (SCM5B39, SCM5B49) are used, or if there is no high-impedance sense input (input low of a differential or pseudo-differential system) on the host measurement system.

Jumper J3 connects the SENSE line (pin 25) to the backpanel signal ground. If the host system has the capability, this allows measuring the SCMPB01/SCMPB01-x ground potential.

Ordering Information

Part Number	Description
SCMPB01	16-channel backpanel with standoffs for mounting.
SCMPB01-1	16-channel backpanel with standoffs for mounting but without cold junction compensation circuits. Use when cost savings is desired and thermocouple-input modules SCM5B37 and SCM5B47 will not be used.
SCMPB01-2	16-channel backpanel with DIN-rail mounting option. The backpanel is mounted on a plate which is captured by the SCMXBExx DIN-rail mounting elements. <i>(Shipped fully assembled.)</i>
SCMPB01-3	16-channel backpanel without cold junction compensation circuits and with DIN-rail mounting option. <i>(Shipped fully assembled.)</i>

For proper operation of the output switch or track-and-hold circuit when using the SCMPB01/SCMPB01-x or SCMPB05/SCMPB05-x backpanels, a current path must exist between the host control logic power common and module I/O Common (module pin 19). This path can be established on the SCMPB01/SCMPB01-x via jumper J4. If this connection exists elsewhere in the system, jumper J4 should be removed since possible ground loops could exist. Other connections of power ground and signal ground usually occur at the A/D or D/A converter of the host measurement system. More information on grounding can be found in [Application Note AN502](#).

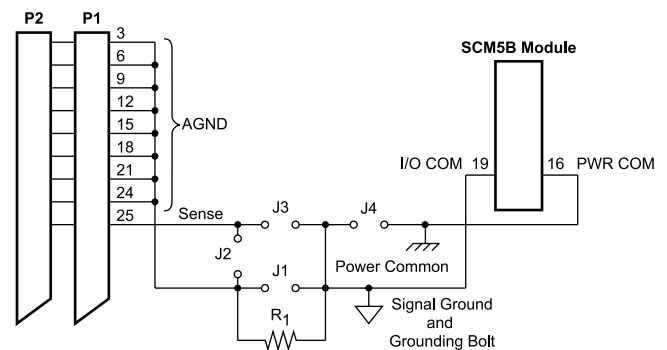


Figure 4: SCMPB01/SCMPB01-x Grounding Diagram

If the connection of power common and AGND shield wires exists in the host measurement system, an optional resistive connection between AGND and the backpanel signal ground can be made via R_1 . R_1 can be as large as 10k Ω ; 100 Ω is a recommended value. Jumper J2 can be used to connect the SENSE line to R_1 when this ground configuration is used.

For full protection against large electrical disturbances on the field-side of the SCM5B modules, a #10-32 ground stud is provided on the backpanel. An electrical connection between this ground stud and system ground should be provided with a large gauge wire of the shortest possible length. When this connection is made, a possible ground loop could result through the AGND shield wires and backpanel signal ground. If the application involves only input modules and a differential input is used by the host measurement system, J1 should be removed. Remember that J1 is required if output modules are used or if the host system does not have differential inputs.

SCMPB02/SCMPB02-x

16-position Analog I/O Backpanel, Multiplexed

DESCRIPTION

The SCMPB02/SCMPB02-x 16-channel backpanel (Figure 1, below) can accept any of the SCM5B analog modules in any mixture. It can be mounted on the SCMXRK-002 19-inch metal rack. The SCMPB02/SCMPB02-x has two analog buses; one for analog input and one for analog output. This two-bus configuration takes advantage of the switch-controlled outputs on the input modules and the track-and-hold inputs on the output modules. A temperature sensor is mounted on each channel to provide cold junction compensation for thermocouple-input modules (see Figure 2, for schematic). Field connections are terminated with four screw terminals at each module site. Up to four SCMPB02/SCMPB02-x backpanels may be daisy-chained. Use SCMCA004-XX cable for daisy-chaining and connecting to host computer.

FEATURES

- 16-position Backpanels (1-(SCMPB03), 2-(SCMPB04), and 8-(SCMPB05) Position also Available)
- Panel or DIN-rail Mounting Options
- 19-inch Mounting Rack For Backpanels
- Multiplexed and Non-multiplexed Backpanels
- With/without Cold Junction Compensation
- Interface Cables
- Module Evaluation Board
- Cable-to-Screw-Terminal Interface Board
- Power Supplies
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Easy Installation
- Accepts any Combination of SCM5B Modules
- 2 Analog Busses: Analog Input and Analog Output
 - Switch-controlled Outputs on the Input Modules;
 - Track-and-Hold Inputs on the Output Modules.

Specifications

Operating Temperature	-40°C to +85°C
Relative Humidity	95% Noncondensing
Interface Connector	
Field System	High-density Screw Clamp, 14 AWG (max) 26-pin, Male Header Connector
Isolation	
Input-to-Output	1500Vrms, Continuous (max)
Channel-to-Channel	1500Vrms, Continuous (max)
Address Input Logic Levels	
Max Logic "0"	0.8V
Min Logic "1"	2.0V
Input Current	
I _i - "0"	0.1µA (max) at 25°C
I _i - "1"	1.0µA (max) -25°C to +85°C
RD EN1 or WR EN1 Signal Delay from Connector P1 to Channels 1-16	
Standalone (address 0-15)	51ns at 25°C 64ns at -25°C to +85°C
Expanded (address 16-63)	100ns at 25°C 126ns at -25°C to +85°C

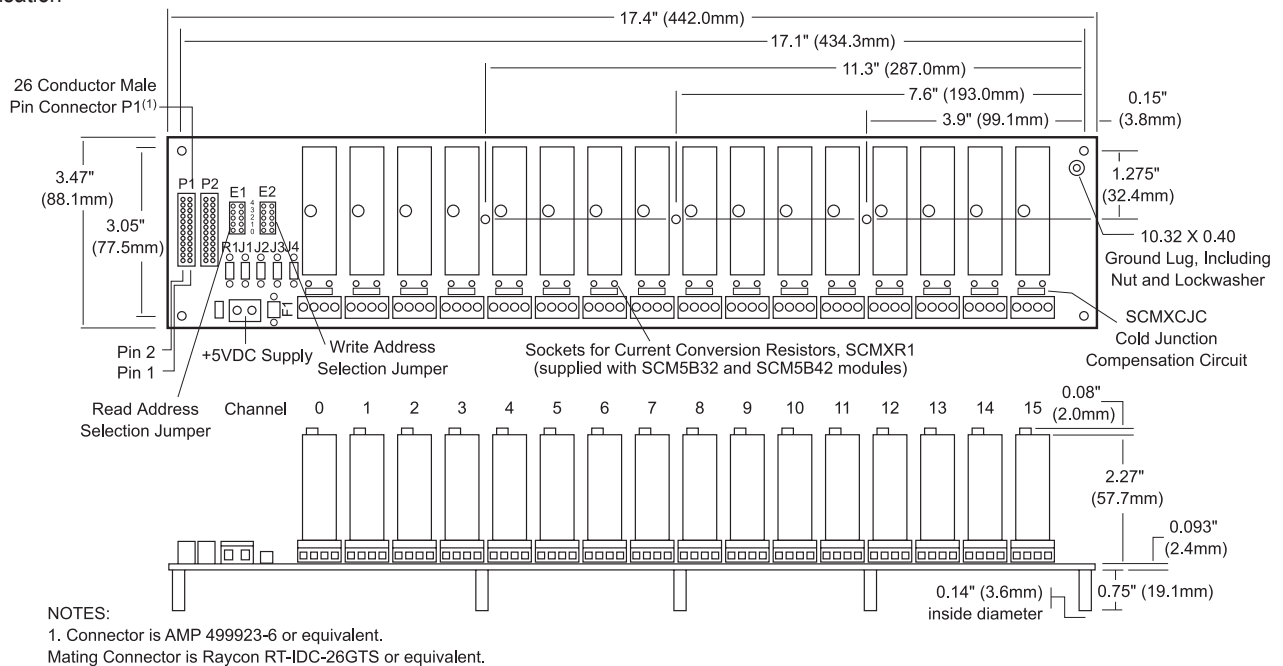


Figure 1: SCMPB02 Analog I/O Backpanel

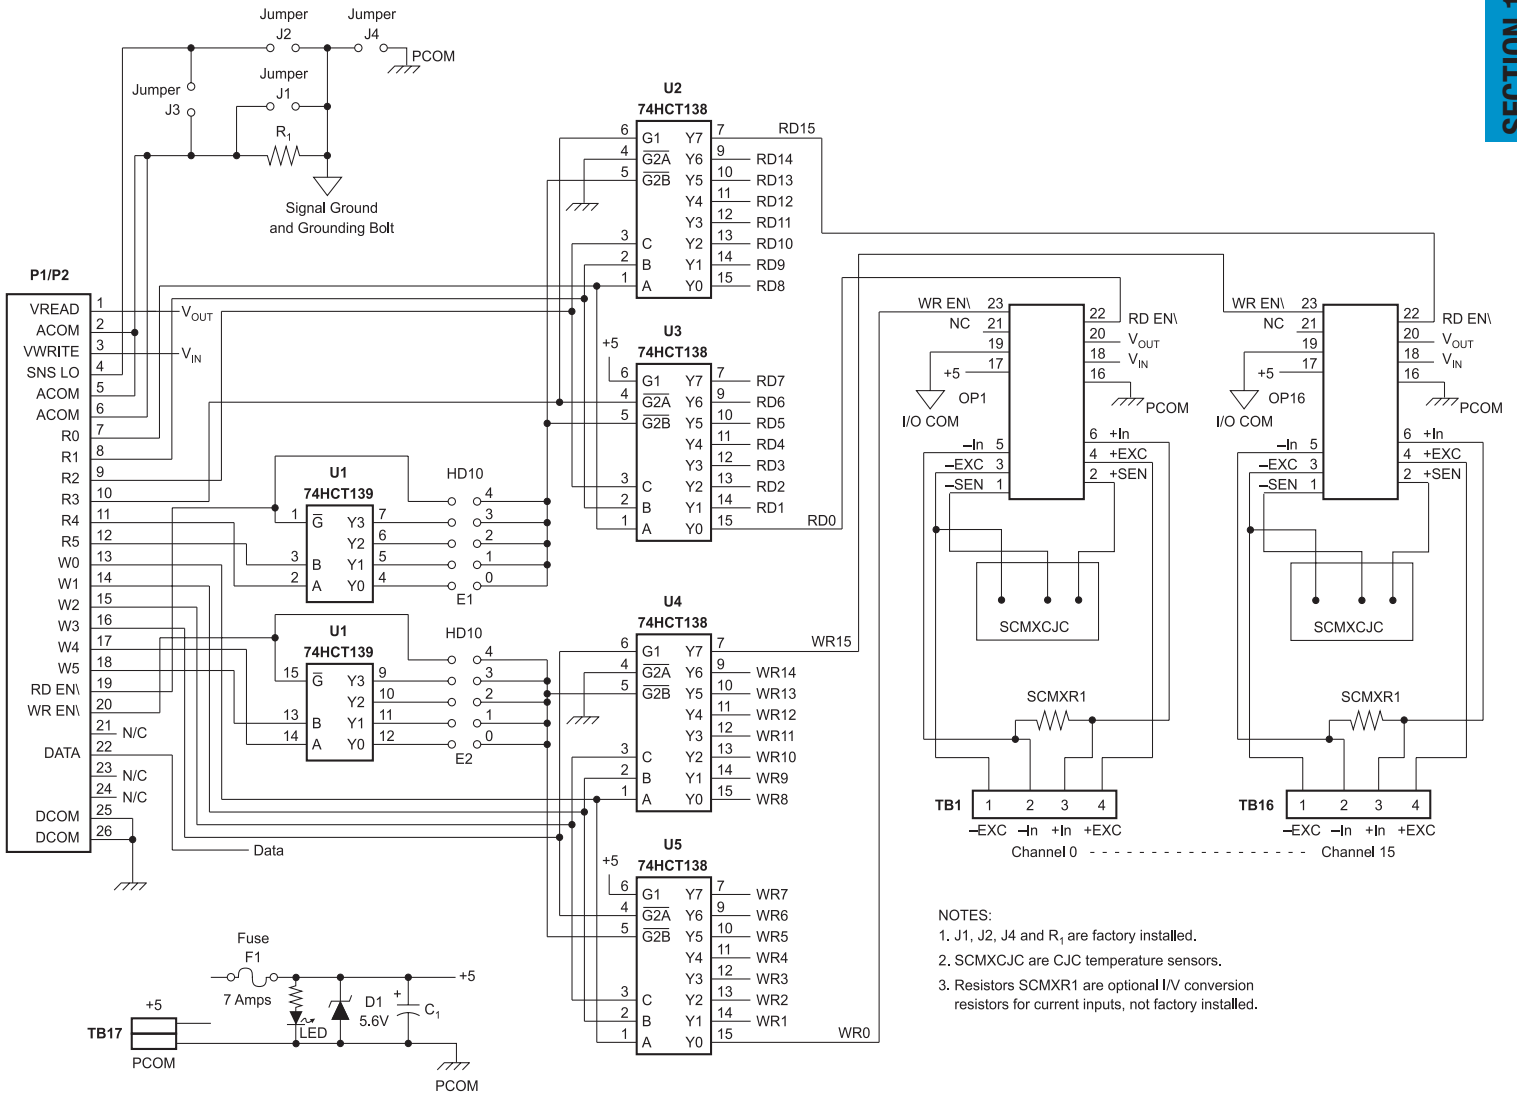


Figure 2: SCMPB02/SCMPB02-x Schematic

- NOTES:
1. J1, J2, J4 and R₁ are factory installed.
 2. SCMXCJC are CJC temperature sensors.
 3. Resistors SCMXR1 are optional I/V conversion resistors for current inputs, not factory installed.

Electrical

P1 and P2 Connectors

The 26-pin P1 and P2 connectors provide the signal interface between the SCMPB02/SCMPB02-x backpanel and the host measurement system. Two separate analog bus connections are provided; one for analog input signals and one for analog output signals. Two sets of six address lines and an enable pin allow input and output modules to be independently multiplexed onto their respective analog signal bus. R0 thru R5 and RD EN\ are used for input modules, and W0 thru W5 and WR EN\ are used for output modules.

Address Selection

The SCMPB02/SCMPB02-x backpanel has address decoding circuitry to allow multiplexing any combination of up to 16 input or output modules. Capability is also provided in the address decode circuitry to expand the system to 64 channels (four SCMPB02/SCMPB02-x backpanels) of multiplexed input or output. Jumpers on HD10 header, E1 and E2 group, select which set of 16 addresses are assigned to a particular backpanel. The E1 group assigns a set of 16 addresses for input modules, and the E2 group assigns a set of 16 addresses for output modules. The table below shows the correlation of jumper position to address range.

E1 Jumper Pos	E2 Jumper Pos	Address Range/Mode
4	4	0-15, STAND ALONE
3	3	48-63, EXPANDED
2	2	32-47, EXPANDED
1	1	16-31, EXPANDED
0	0	0-15, EXPANDED

To connect multiple SCMPB02/SCMPB02-x backpanels in this expanded configuration, use interconnect cable SCMCA004-XX.

Modules with system output of $\pm 10V$ or 0-10V cannot be mixed with modules with system output of $\pm 5V$ or 0-5V within a given system.

Power

The SCMPB02/SCMPB02-x backpanel requires external +5VDC $\pm 5\%$ power. The chassis-mounted SCMPRE-003 or SCMPRT-003 power supplies have adequate capacity to power any combination of modules.

Fusing

The SCMPB02/SCMPB02-x backpanel power is fuse protected through F1. This is a Littelfuse type 252007, 7A fuse. Zener diode DZ1 provides extra protection by clamping the input power voltage to +5.6V. If the input supply voltage connection is reversed, this zener diode will be forward biased and fuse F1 will be blown.

Grounding

Figure 3 details the optional ground jumper configuration available on the SCMPB02/SCMPB02-x backpanel. Jumpers J1, J2, and J4 are factory installed.

Jumper J1 connects the SIG COM shield wires (pins 2, 5, and 6) to the backpanel signal ground. This provides a ground connection between the host system and backpanel. Jumper J1 is required if output modules (SCM5B39, SCM5B49) are used, or if there is no high impedance sense input (input low of a differential or pseudo-differential system) on the host measurement system.

Jumper J2 connects the SNS LO line (pin 4) to the backpanel signal ground. If the host system has the capability, this allows measuring the SCMPB02/SCMPB02-x ground potential.

Ordering Information

Part Number	Description
SCMPB02	16-channel backpanel with standoffs for mounting.
SCMPB02-1	16-channel backpanel without cold junction compensation circuits and standoffs for mounting. Use when cost savings is desired and thermocouple-input modules SCM5B37 and SCM5B47 will not be used.
SCMPB02-2	16-channel backpanel with DIN-rail mounting option. The backpanel is mounted on a plate which is captured by the SCMBExx DIN-rail mounting elements. (Shipped fully assembled.)
SCMPB02-3	16-channel backpanel without cold junction compensation circuits and with DIN-rail mounting option. (Shipped fully assembled.)

For proper operation of the output switch or track-and-hold circuit when using the SCMPB02/06 backpanels, a current path must exist between the host control logic power common and module I/O Common (module pin 19). This path can be established on the SCMPB02/SCMPB02-x via jumper J4. If this connection exists elsewhere in the system, jumper J4 should be removed since possible ground loops could exist. Other connections of power ground and signal ground usually occur at the A/D or D/A converter of the host measurement system. More information on grounding can be found in [Application Note AN502](#).

If the connection of power common and SIG COM shield wires exists in the host measurement system, a resistive connection between SIG COM and the backpanel signal ground can be made via R_1 . R_1 can be as large as 10k Ω , 100 Ω is a recommended value. Jumper J3 can be used to connect the SNS LO line to R_1 when this ground configuration is used.

For full protection against large electrical disturbances on the field-side of the SCM5B modules, a #10-32 ground stud is provided on the backpanel. An electrical connection between this ground stud and system ground should be provided with a large gauge wire of the shortest possible length. When this connection is made, a possible ground loop could result through the SIG COM shield wires and backpanel signal ground. If the application involves only input modules and a differential input is used by the host measurement system, J1 should be removed. Remember that J1 is required if output modules are used or if the host system does not have differential inputs.

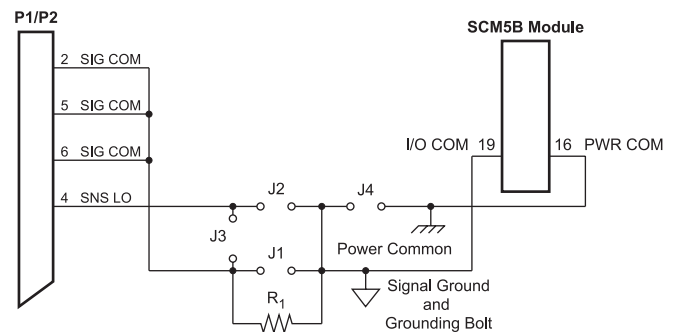


Figure 3: SCMPB02/SCMPB02-x Grounding Diagram

SCMPB03/SCMPB03-x and SCMPB04/SCMPB04-x



DESCRIPTION

The SCMPB03/SCMPB03-x and SCMPB04/SCMPB04-x are single- and dual-channel mounting panels for the SCM5B modules. Both are intended for DIN-rail mounting.

See Figures 1 and 2 for wiring diagrams, Figure 4 for schematic.

The following accessories are required for mounting one SCMPB03/04 panel (Figure 3):

Qty	Model	Description
1	SCMXBEFE	Base Element with Snap Foot
2	SCMXSE	Side Element

The following accessories are required for mounting two or more SCMPB03/04 panels:

Qty	Model	Description
2	SCMXBEFE	Base Element with Snap Foot
2	SCMXSE	Side Element
(# panels)-2	SCMXBE	Base Element with Snap Foot
(4 x (# panels))-4	SCMXVS	Connection Pins

The following DIN-rail styles are available. Specify length in meters (-XX)

SCMXRAIL1-XX	DIN EN 50022-35x7.5 (slotted steel)
SCMXRAIL2-XX	DIN EN 50035-G32 (slotted steel)
SCMXRAIL3-XX	DIN EN 50022-35x15 (slotted steel)

Specifications

Operating Temperature	-40°C to +85°C
Relative Humidity	95% Noncondensing
Interface Connector: Field System	High-Density Screw Clamp, 14 AWG (max) High-Density Screw Clamp, 14 AWG (max)
Isolation: Input-to-Output Channel-to-Channel	1500Vrms, Continuous (max) 1500Vrms, Continuous (max)

FEATURES

- Single-channel-SCMPB03, Dual-channel-SCMPB04 Backpanels
- Panel or DIN-rail Mounting Options
- With/without Cold Junction Compensation-SCMPB04
- Interface Cables
- Module Evaluation Board
- Cable-to-Screw-Terminal Interface Board
- Power Supplies
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Easy Installation
- Optimized for DIN-rail Use

Ordering Information

Part Number	Description
SCMPB03	Single-channel backpanel. No mounting hardware included.
SCMPB03-2	Single-channel backpanel with din-rail mounting hardware. (Shipped fully assembled.)
SCMPB04	Dual-channel backpanel. No mounting hardware included.
SCMPB04-1	Dual-channel backpanel without cold junction compensation circuits. Use when cost savings is desired and thermocouple input modules SCM5B37 and SCMPB47 will not be used. No mounting hardware included.
SCMPB04-2	Dual-channel backpanel with DIN-rail mounting hardware. (Shipped fully assembled.)
SCMPB04-3	Dual-channel backpanel without cold junction compensation circuits and with DIN-rail mounting hardware. (Shipped fully assembled.)

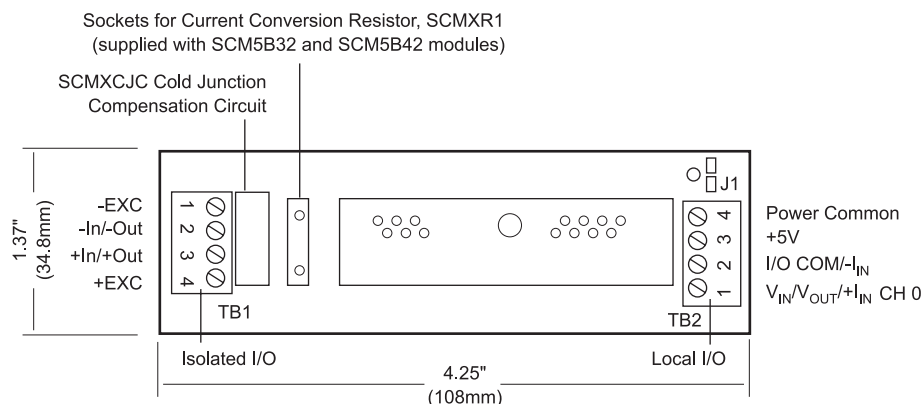


Figure 1: SCMPB03/SCMPB03-x Analog I/O Backpanel

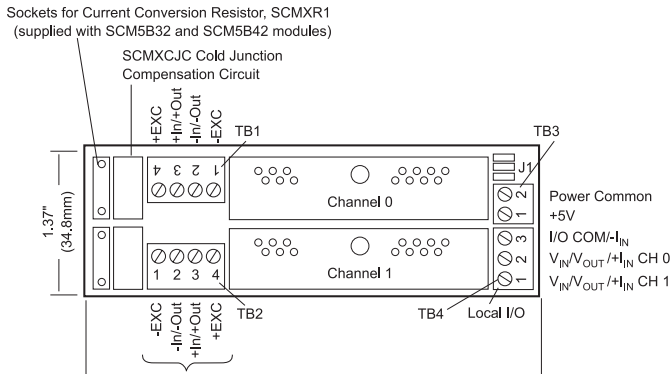


Figure 2: SCMPB04/SCMPB04-x Analog I/O Backpanel


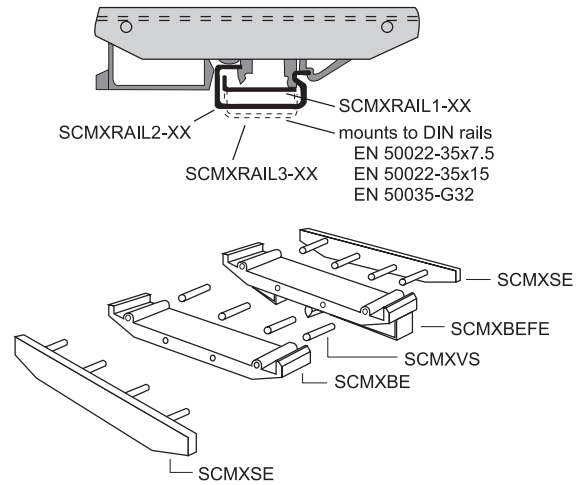


Figure 3: DIN-rail Mounting Elements

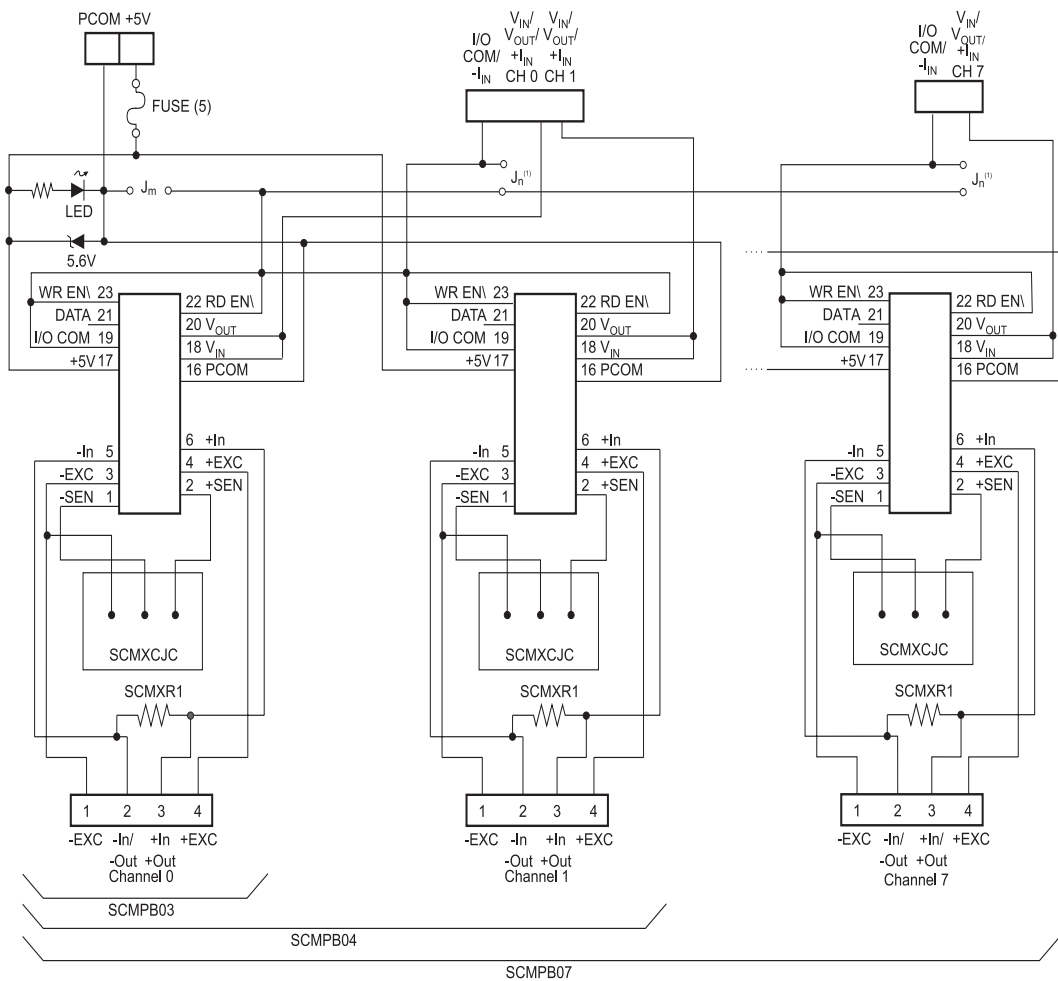

- NOTES:**
1. Jumpers J_n are on SCMPB07 only. Factory installed.
 2. Jumper J_m is factory installed and is a 0Ω resistor.
 3. SCMXCJC are CJC temperature sensors.
 4. Resistors SCMXR1 are optional I/V conversion resistors for current inputs, not factory installed.
 5. Fuse is on SCMPB07 only.
 6. See backpanel drawings for terminal block positions and terminal assignments.

Figure 4: SCMPB03/SCMPB03-x/SCMPB04/SCMPB04-x/SCMPB07/SCMPB07-x Schematic

SCMPB05/SCMPB05-x



8-position Analog I/O Backpanel, Non-Multiplexed

DESCRIPTION

The SCMPB05/SCMPB05-x backpanel (Figure 1, below) can accept up to eight SCM5B analog input and/or output modules in any combination. It can be mounted on the SCMXRK-002 19-inch metal rack. A separate analog signal path is provided for each channel and each channel's signal is accessible at redundant 26-pin connectors. The module output switch is continuously "on" when using this backpanel and all eight module outputs are simultaneously accessible to high-speed data acquisition (ADC) boards.

On-board jumpers permit paralleling two SCMPB05/SCMPB05-x boards to form a SCMPB01 equivalent. An additional set of inter-channel bridge jumpers permits connecting an input module's output to an output module's input, providing two levels of isolation (Figures 1 and 2).

Jumpers on the SCMPB05/SCMPB05-x permit user selection of low (i.e. channels 0-7) or high (i.e. channels 8-15) addresses.

A temperature sensor mounted on each channel provides cold junction compensation for thermocouple-input modules (see Figure 2 for schematic). Field connections are terminated with four screw terminals at each module site. Use system interface cable SCMXCA004-XX for connection to the host system.

Electrical Address Selection

Module addresses may be selected as low (channels 0-7) or high (channels 8-15) using the sets of 3 pins labeled J5 through J12. Place a jumper over the two pins closest to the ribbon cable connectors, P1 and P2, to select a low address (factory configuration) or over the two pins furthest from the ribbon cable connectors, P1 and P2, to select a high address.

Adjacent Channel Jumper

Adjacent channels may be connected together to provide an isolated output signal from an isolated input module, providing two levels of 1500V isolation. This capability is provided with the seven jumpers labeled JP1-JP7. See page 1-54 for an example.

Refer to page 1-47 for additional notes on the P1 and P2 connectors, power requirements, fusing and grounding issues.

Specifications

Operating Temperature	-40°C to +85°C
Relative Humidity	95% Noncondensing
Interface Connector: Field System	High-Density Screw Clamp, 14 AWG (max) 26-pin, Male Header Connector
Isolation: Input-to-Output Channel-to-Channel	1500Vrms, Continuous (max) 1500Vrms, Continuous (max)

FEATURES

- 8-channel Backpanels
- Panel or DIN-rail Mounting Options
- 19-inch Mounting Rack for Backpanels
- With/without Cold Junction Compensation
- Non-Multiplexed
- Interface Cables
- Module Evaluation Board
- Cable-to-Screw-Terminal Interface Board
- Power Supplies
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Easy Installation
- Optimized for DIN-rail Use
- Accepts Any Combination of SCM5B Modules
- Continuous "ON" for High-speed (ADC) Simultaneous Data Acquisition
- Inter-channel Bridge Jumpers Permit Two-level Isolation

Ordering Information

Part Number	Description
SCMPB05	8-channel backpanel with standoffs for mounting. No mounting hardware included.
SCMPB05-1	8-channel backpanel without cold junction compensation circuits and standoffs for mounting. Use when cost savings is desired and thermocouple-input modules SCM5B37 and SCM5B47 will not be used. No mounting hardware included.
SCMPB05-2	8-channel backpanel with DIN-rail mounting option. The backpanel is mounted on a plate which is captured by the SCMXBExx DIN-rail mounting elements. (Shipped fully assembled.)
SCMPB05-3	8-channel backpanel without cold junction compensation circuits and with DIN-rail mounting option. (Shipped fully assembled.)

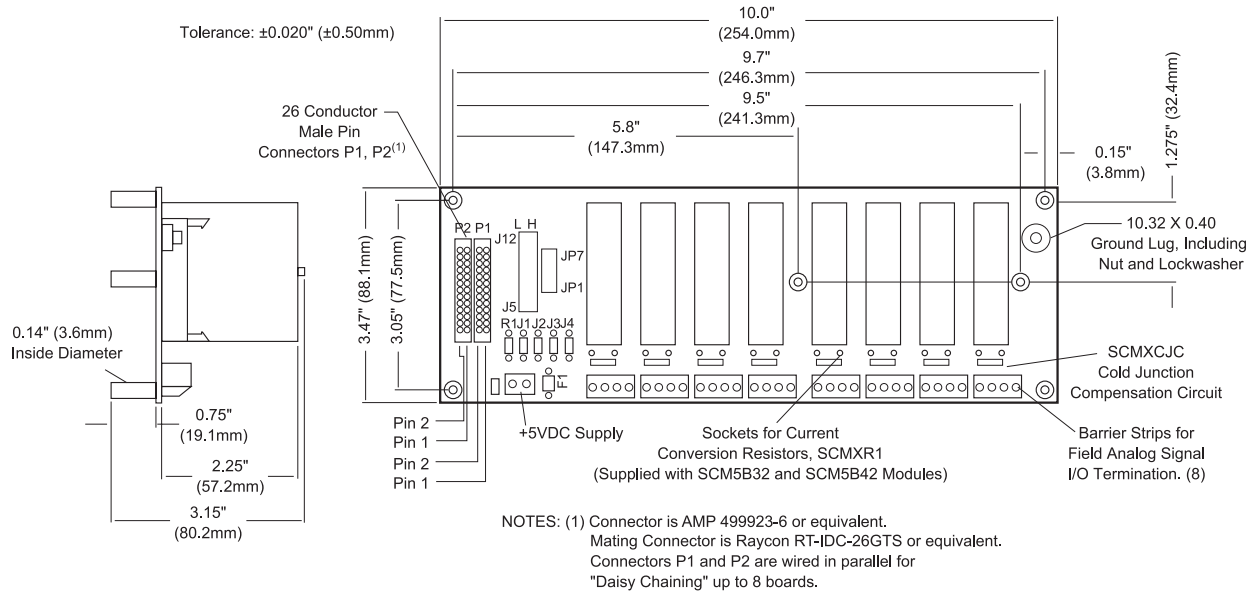


Figure 1: SCMPB05/SCMPB05-x Analog I/O Backpanel

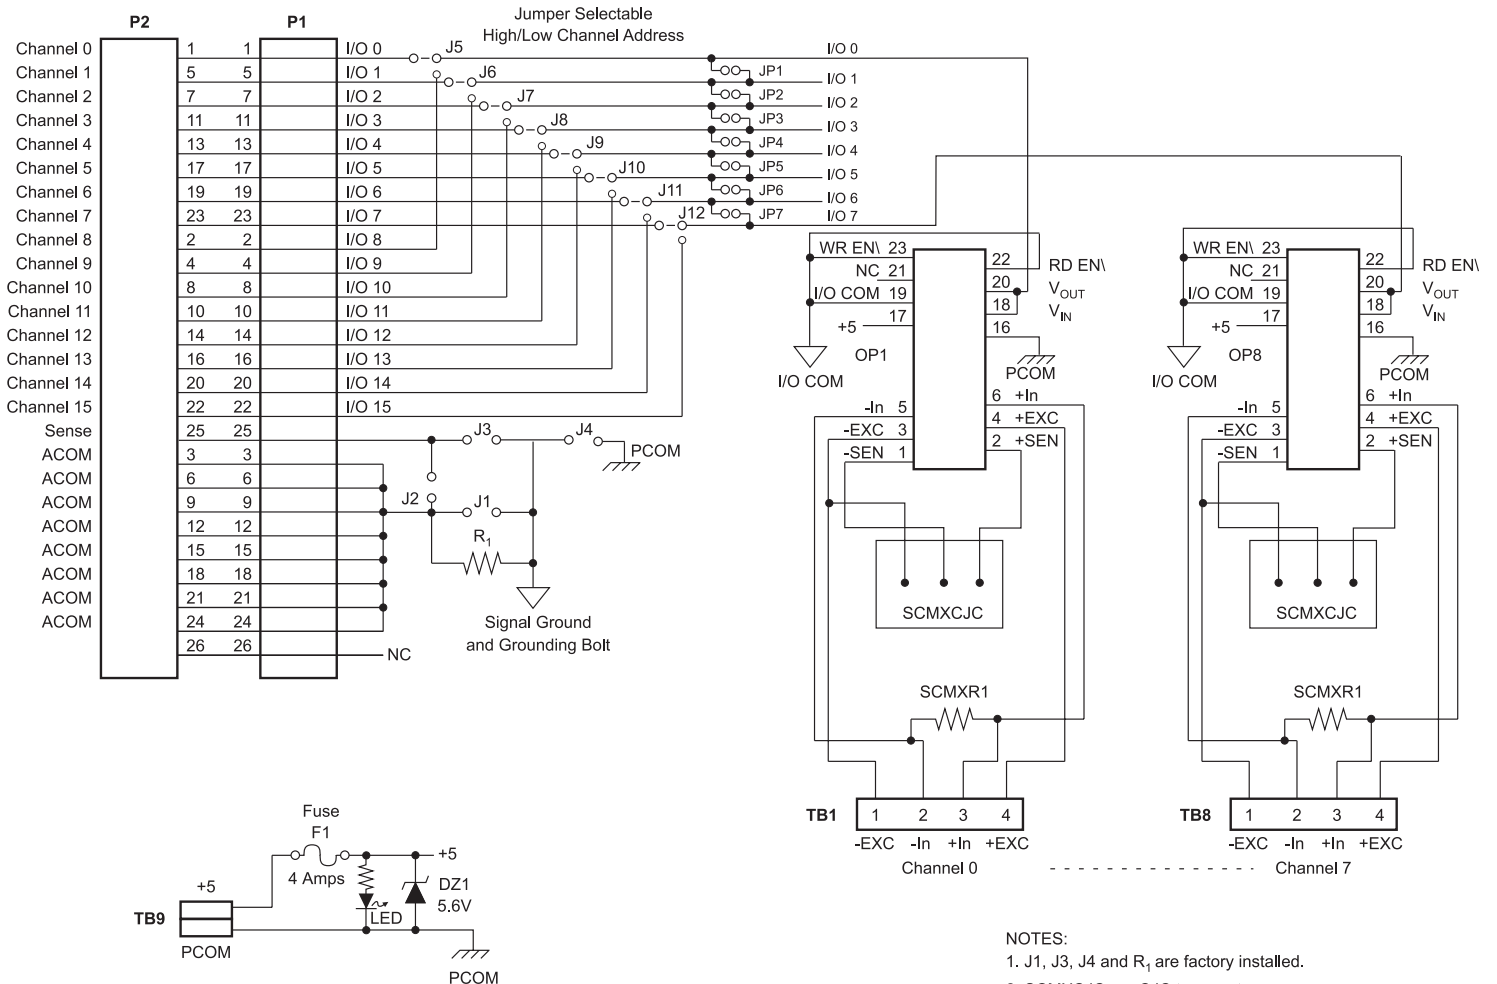


Figure 2: SCMPB05/SCMPB05-x Schematic

SCMPB06/SCMPB06-x

8-position Analog I/O Backpanel, Multiplexed



DESCRIPTION

The SCMPB06/SCMPB06-x backpanel (Figure 1) can accept up to eight SCM5B modules in any combination. It can be mounted on the SCMXRK-002 19-inch metal rack. The SCMPB06/SCMPB06-x has two analog buses; one for analog input and one for analog output. This two-bus configuration takes advantage of the switch controlled outputs on the input modules and the track-and-hold inputs on the output modules. A temperature sensor is mounted on each channel to provide cold junction compensation for thermocouple-input modules (see Figure 2 for schematic). Field connections are terminated with four screw terminals at each module site. Up to eight SCMPB06/SCMPB06-x backpanels may be daisy-chained. Use SCMCA004-XX cable for daisy-chaining and connecting to host computer.

Jumpers on the SCMPB06/SCMPB06-x permit user selection of low (i.e. channels 0-7) or high (i.e. channels 8-15) addresses.

Electrical Address Selection

Module read and write addresses may be selected as low (channels 0-7) or high (channels 8-15) using the four sets of 3 position jumpers labeled J5 through J8. Place a jumper over the two pins furthest from the field I/O termination blocks on all four sets to select a low address (factory configuration) or over the two pins closest to the field I/O termination blocks on all four sets to select a high address.

The SCMPB06/SCMPB06-x backpanel has address decoding circuitry to allow multiplexing any combination of up to 8 input or output modules. Capability is also provided in the address decode circuitry to expand the system to 64 channels (eight SCMPB06/SCMPB06-x backpanels) of multiplexed input or output. Jumpers select which set of 16 addresses are assigned to a particular backpanel. The Read Address group assigns a set of 16 addresses for input modules, and the Write Address group assigns a set of 16 addresses for output modules. The table, *Analog Selection Jumpers*, page 1-57, shows the correlation of jumper position to address range. Refer to page 1-50 for additional notes on the P1 and P4 connectors, power requirements, fusing, and grounding issues.

Modules with system output of ±10V or 0-10V cannot be mixed with modules with system output of ±5V or 0-5V within a given system.

FEATURES

- 8-channel Backpanels
- Panel or DIN-rail Mounting Options
- 19-inch Mounting Rack for Backpanels
- With/without Cold Junction Compensation
- Multiplexed
- Interface Cables
- Module Evaluation Board
- Cable-to-Screw-Terminal Interface Board
- Power Supplies
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Easy Installation
- 2 Analog Busses: Analog Input and Analog Output
 - Switch-controlled Outputs on the Input Modules;
 - Track-and-Hold Inputs on the Output Modules.
- Jumpers Permit User-selection of Low (i.e. channels 0-7) or High (i.e. channels 8-15) Addresses

Specifications

Operating Temperature	-40°C to +85°C
Relative Humidity	95% Noncondensing
Interface Connector	High-Density Screw Clamp, 14 AWG (max)
Field System	26-pin, Male Header Connector
Isolation	
Input-to-Output	1500Vrms, Continuous (max)
Channel-to-Channel	1500Vrms, Continuous (max)
Address Input Logic Levels	
Max Logic "0"	0.8V
Min Logic "1"	2.0V
Input Current	
I _i - "0"	0.1µA (max) at +25°C
I _i - "1"	1.0µA (max) -25°C to +85°C
RD EN\ or WR EN\ Signal Delay From Connector P1 to Channels	
0-7	51ns at +25°C, 64ns at -25°C to +85°C
Standalone (address 0-7)	100ns at +25°C, 126ns at -25°C to +85°C
Expanded (address 8-63)	

Ordering Information

Part Number	Description
SCMPB06	8-channel backpanel with standoffs for mounting. No mounting hardware included.
SCMPB06-1	8-channel backpanel without cold junction compensation circuits and standoffs for mounting. Use when cost savings is desired and thermocouple-input modules SCM5B37 and SCM5B47 will not be used. No mounting hardware included.
SCMPB06-2	8-channel backpanel with din-rail mounting option. The backpanel is mounted on a plate which is captured by the SCMXBExx DIN-rail mounting elements. (Shipped fully assembled.)
SCMPB06-3	8-channel backpanel without cold junction compensation circuits and with DIN-rail mounting option. (Shipped fully assembled.)


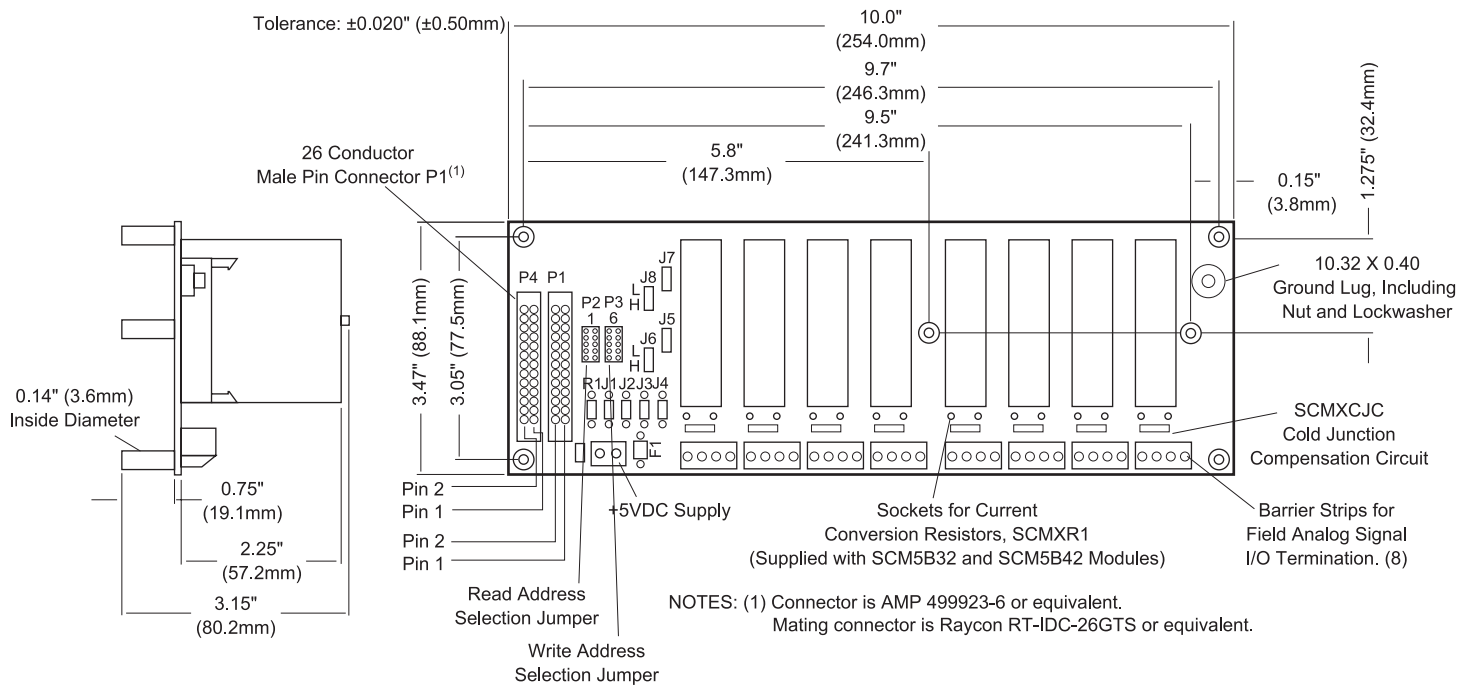


Figure 1: SCMPB06/SCMPB06-x Analog I/O Backpanel

Address Selection Jumpers

Read Address Jumper (P2)	Write Address Jumper (P3)	High/Low Channel Address (J5, J6, J7, J8)	Address Range
1	6	L	0-7 Stand Alone
1	6	H	8-15 Stand Alone
2	7	L	48-55 Expanded
2	7	H	56-63 Expanded
3	8	L	32-39 Expanded
3	8	H	40-47 Expanded
4	9	L	16-23 Expanded
4	9	H	24-31 Expanded
5	10	L	0-7 Expanded
5	10	H	8-15 Expanded

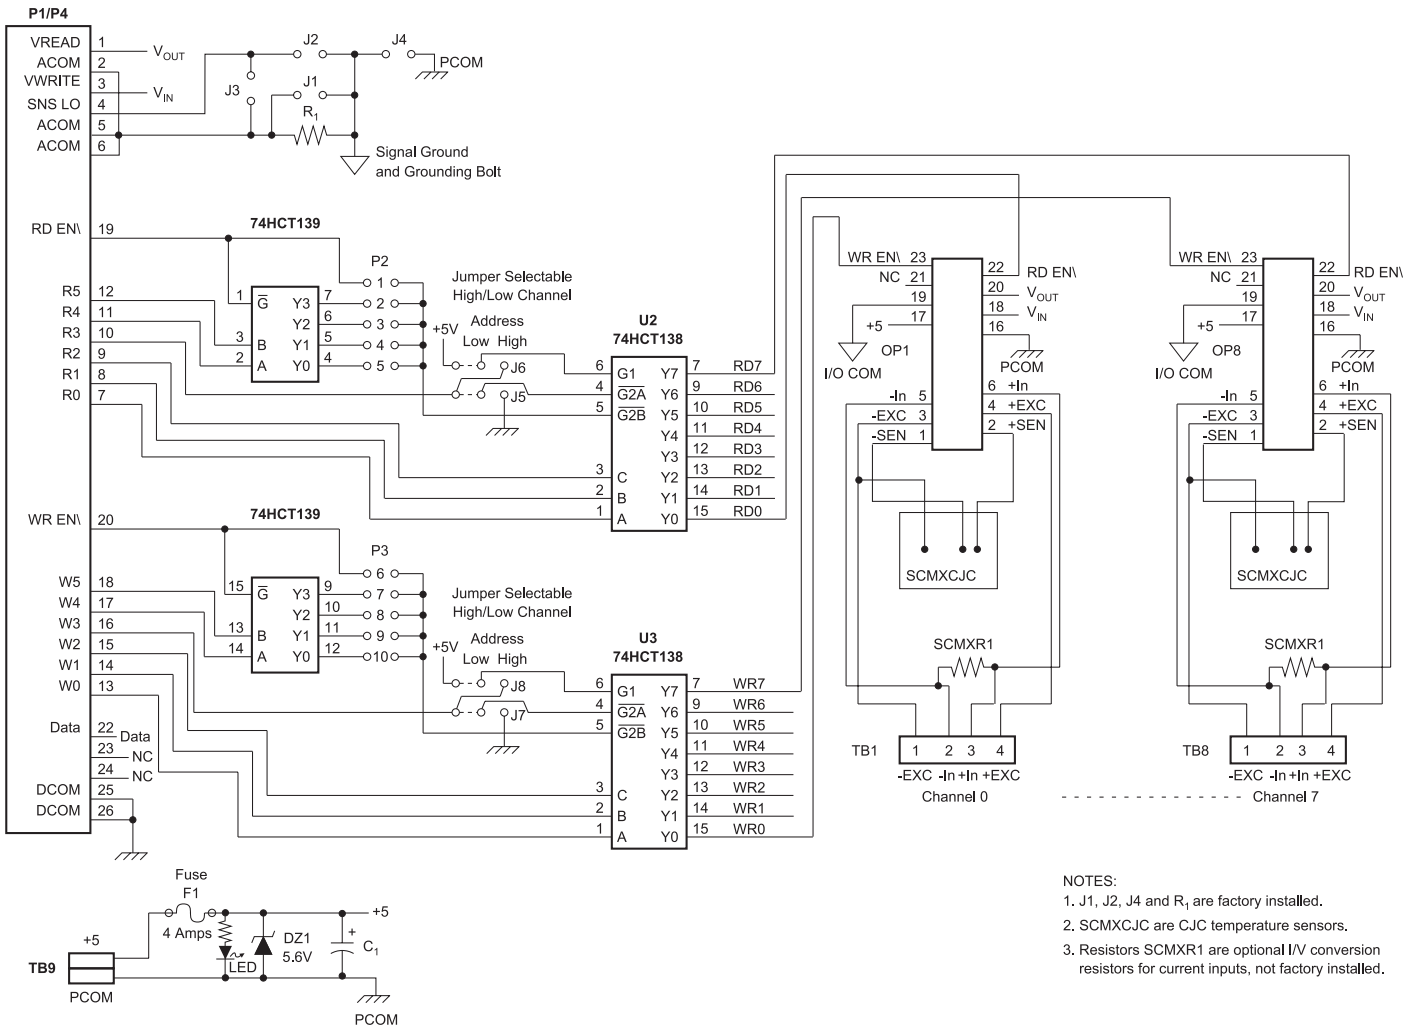

- NOTES:
1. J1, J2, J4 and R₁ are factory installed.
 2. SCMXCJC are CJC temperature sensors.
 3. Resistors SCMXR1 are optional I/V conversion resistors for current inputs, not factory installed.

Figure 2: SCMPB06/SCMPB06-x Schematic

SCMPB07/SCMPB07-x



8-position Backpanel, High-Density, Non-Multiplexed

DESCRIPTION

The SCMPB07/SCMPB07-x 8-channel high-density backpanel can accept any of the SCM5B analog modules in any mixture. Its overall width is 5.5 inches (139.7mm) versus 10 inches (254mm) for the SCMPB05/SCMPB05-x and SCMPB06/SCMPB06-x 8-channel backpanels. Separate analog signal paths are provided for each channel. Each channel provides four high-density screw terminals for field connections and two high-density screw terminals for host system connection. It also provides a jumper on each channel to optionally connect or isolate each module's I/O common from other channel's I/O common and/or power common (Figure 1).

See Figure 4 on page 1-52 for schematic.

SCMPB07 and SCMPB07-1 can be upgraded to DIN-rail mounting. The following accessories are required for mounting one SCMPB07 or one SCMPB07-1 backpanel (for a visual example, reference SCMPB03/SCMPB04 page 1-52, Figure 3):

Qty	Model	Description
2	SCMXBEFE	Base element with snap foot
2	SCMXSE	Side element
2	SCMXBE	Base element without snap foot
12	SCMXVS	Connection pins

Specifications

Operating Temperature	-40°C to +85°C
Relative Humidity	95% Noncondensing
Interface Connector	
Field	High-Density Screw Clamp, 14 AWG (max)
System	High-Density Screw Clamp, 14 AWG (max)
Isolation	
Input-to-Output	1500Vrms, Continuous (max)
Channel-to-Channel	1500Vrms, Continuous (max)

FEATURES

- 8-channel Backpanels
- Panel or DIN-rail Mounting Options
- With/without Cold Junction Compensation
- Non-Multiplexed
- Interface Cables
- Module Evaluation Board
- Cable-to-Screw-Terminal Interface Board
- Power Supplies
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Easy Installation
- Accepts any Combination of SCM5B Modules
- High-Density Board – Overall Width is 5.5" vs 10"
- Each Channel Provides 4 High-density Screw Terminals for Field Connections and 2 High-density Screw Terminals for Host System Connection

Ordering Information

Part Number	Description
SCMPB07	8-channel backpanel. No mounting hardware included.
SCMPB07-1	8-channel backpanel without cold junction compensation circuits. Use when cost savings is desired and thermocouple input modules SCM5B37 and SCMPB47 will not be used. No mounting hardware included
SCMPB07-2	8-channel backpanel with DIN-rail mounting hardware. (Shipped fully assembled.)
SCMPB07-3	8-channel backpanel without cold junction compensation circuits and with DIN-rail mounting hardware. (Shipped fully assembled.)

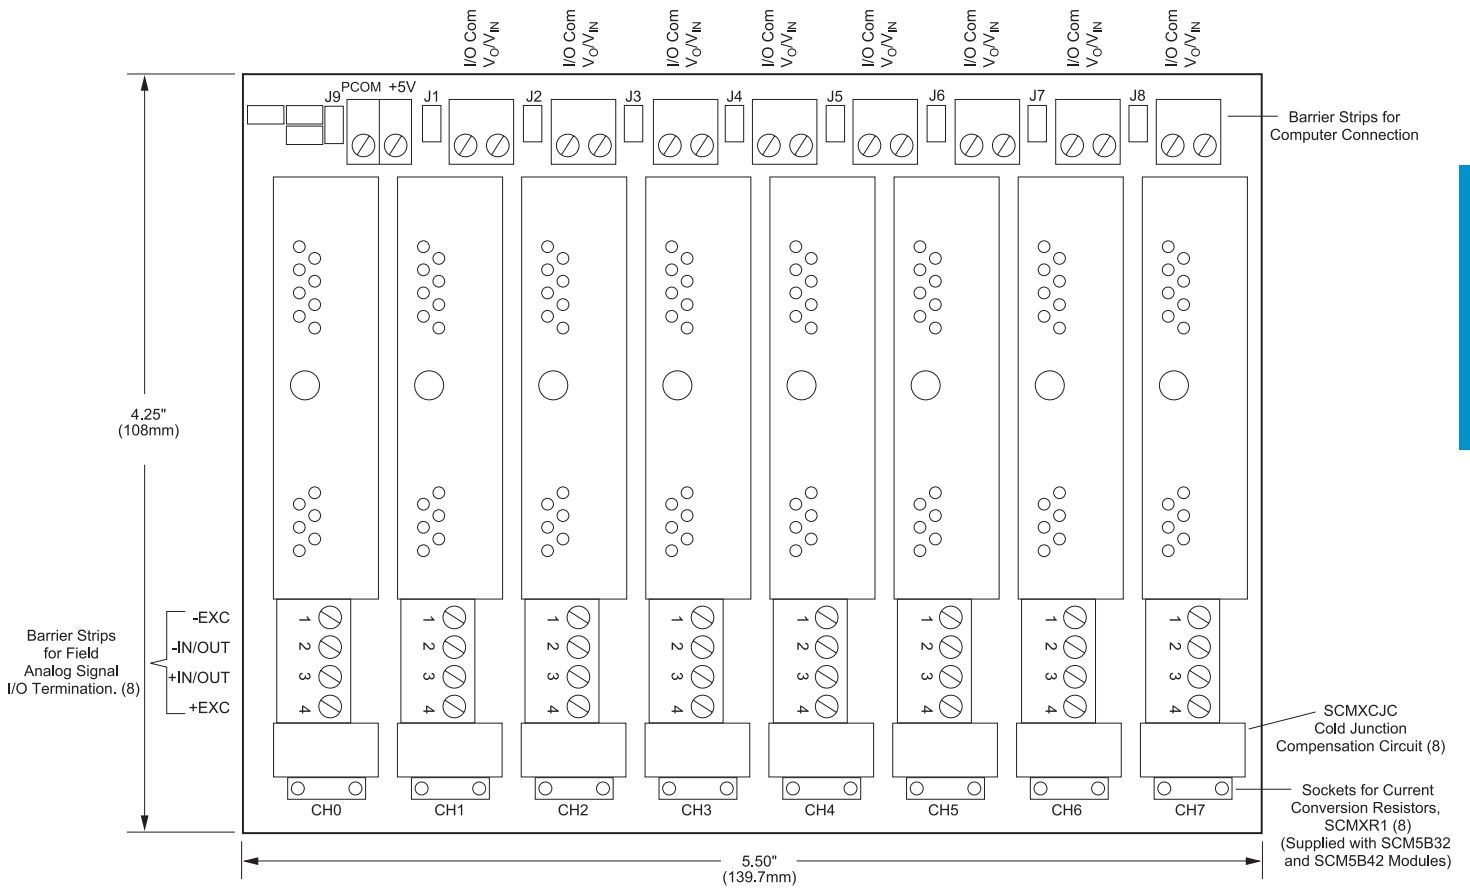


Figure 1: SCMPB07/SCMPB07-x Analog I/O Backpanel

SCMXEV

Analog Module Evaluation Board

DESCRIPTION

The SCMXEV is a single-channel board with a test socket for SCM5B module evaluation (Figure 1). All signal input/output, control, and power connections are connected to terminal blocks for ease of user access. A cold junction temperature sensor circuit is included for evaluation of thermocouple modules (see Figure 2 for schematic).

The SCMXEV is mechanically compatible with DIN-rail mounting. The following accessories are required for mounting one SCMXEV board (for a visual example, reference SCMPB03/SCMPB03-x and SCMPB04/SCMPB04-x page 1-51, Figure 3):

Qty	Model	Description
2	SCMXBEFE	Base element with snap foot
2	SCMXSE	Side element
4	SCMXVS	Connection pins

Two jumpers are provided for customer use. The first, J1, provides a current path between +5V Power Common (module pin 16) and I/O Common (module pin 19). A path must exist between the host control logic power common and module I/O Common for proper operation of the module output switch or track-and-hold circuit. If this connection exists elsewhere in the system, jumper J1 should be removed since possible ground loops could exist. Other connections of power ground and signal ground usually occur at the A/D or D/A converter of the host measurement system.

Jumper J2 is used in the cold junction compensation circuit. If it is installed, the compensation circuit is enabled and will provide the proper compensation voltage to correct for the thermoelectric effect at the +In and -In screw terminals.


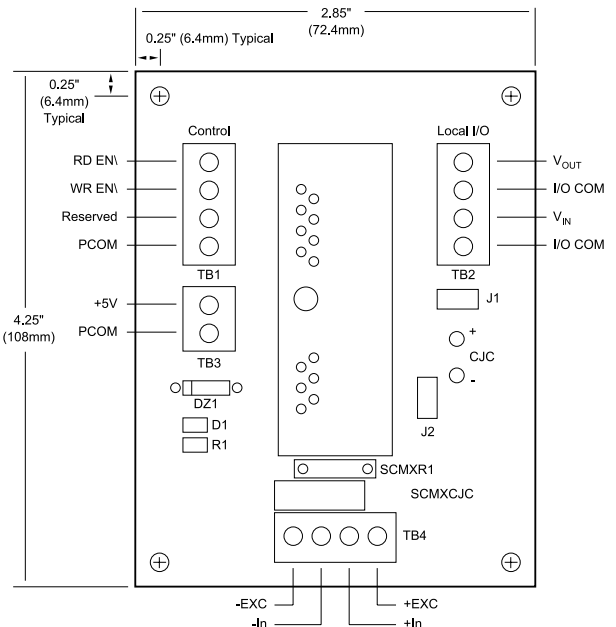


Figure 1: SCMXEV Evaluation Board Dimensions and Pin Layout

If an external simulation voltage is desired for cold junction compensation, J2 should be removed. The external voltage is applied at the sockets labeled CJC+ and CJC-. An external voltage of 510.0mV corresponds to an ambient temperature of +25°C. The transfer function of the onboard compensation circuit is $V_{CJC} = 0.510 - 0.0025(T-25)V$.

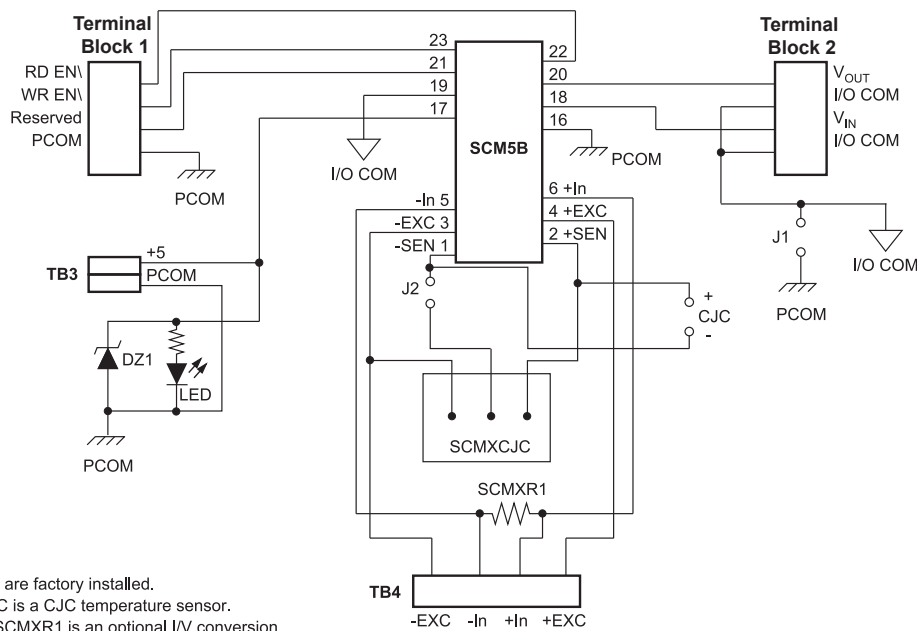

- NOTES:
- J1 and J2 are factory installed.
 - SCMXCJC is a CJC temperature sensor.
 - Resistor SCMXR1 is an optional I/V conversion resistor for current inputs, not factory installed.

Figure 2: SCMXEV Evaluation Board Schematic

SCMXCA004-01, -02

Interface Cable

DESCRIPTION

The SCMXCA004-XX is the system interface cable for the SCMPB01/02/05/06 backpanels. This is a 26-conductor ribbon cable with a mass-terminated socket connector installed on each end. It can be ordered in lengths of 1m and 2m; -xx denotes required length in meters (see Figure 1).

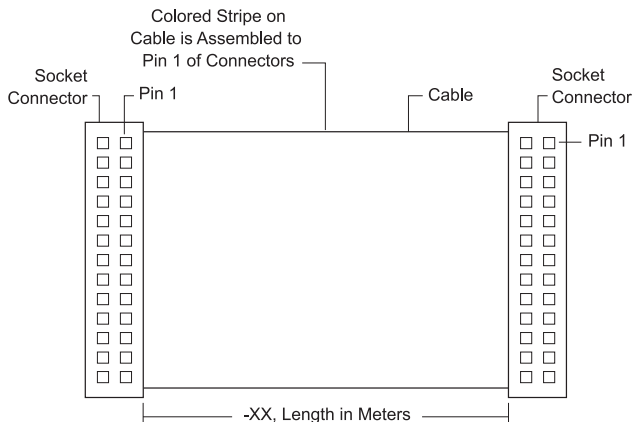


Figure 1: SCMXCA004-XX System Interface Cable

SCMXIF (-DIN)

Universal Interface Board

DESCRIPTION

The SCMXIF is a universal interface board which converts a 26-pin ribbon cable input to 26 screw terminals for discrete wire. It can be mounted on the back of the SCMXRK-002 mounting rack (SCMXIF) or on a DIN-rail (SCMXIF-DIN). Required mounting hardware is included. Use SCMXCA004-XX cable (see Figure 2 for dimensions).

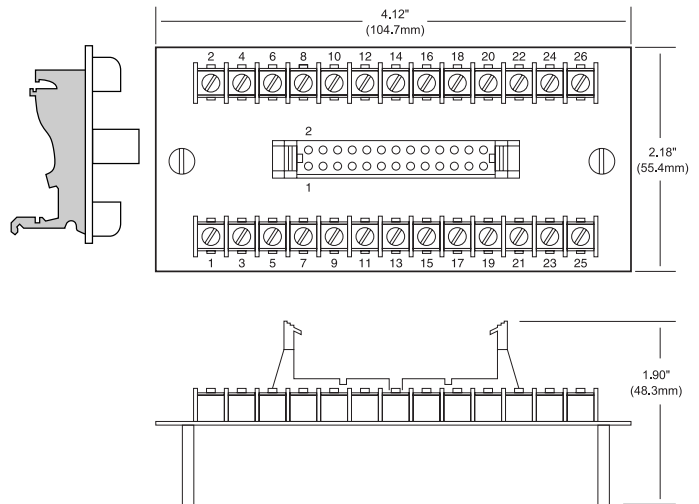


Figure 2: SCMXIF Universal Interface Board Dimensions

SCMXRK-002

19-inch Metal Mounting Rack

DESCRIPTION

The SCMXRK-002 is a 19-inch metal rack for mounting the SCMPB01/02/05/06, SCM7BP04/08/16, SCMVAS-PB8/16 and isoLynx® SLX200-xx backpanels. It also provides capability to mount the

SCMXPRT-001, SCMXPRE-001, SCMXPRT-003 or SCMXPRE-003 power supplies, and the SCMXIF interface board (see Figure 3 for dimensions).

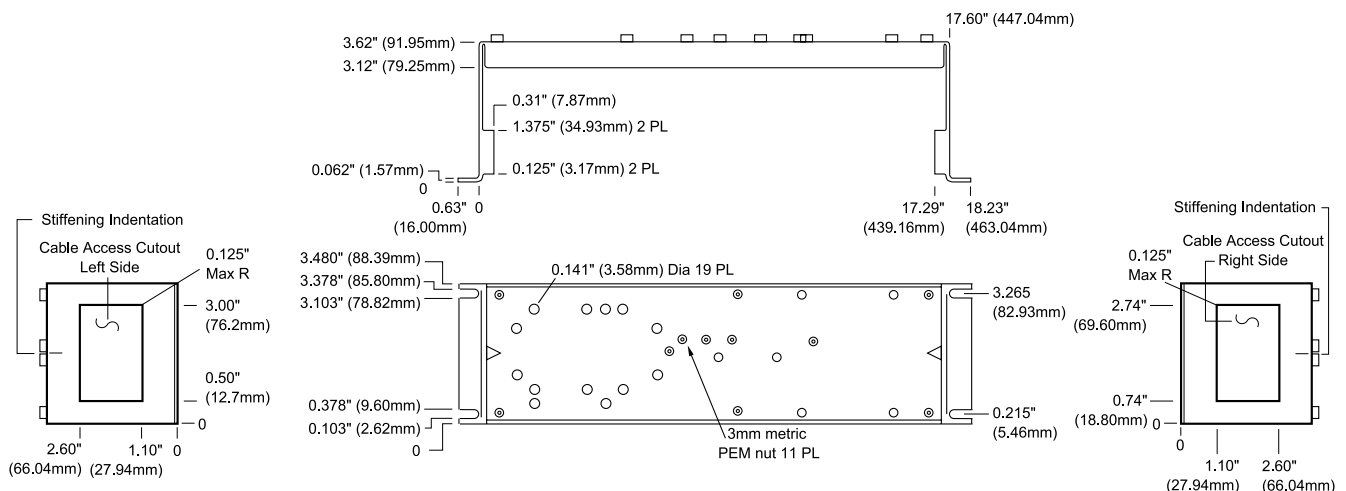


Figure 3: SCMXRK-002 Analog Rack Dimensions

SCM5BPT
Pass-thru Module




SCMXCJC



Encapsulated Cold Junction Compensation

DESCRIPTION

The SCM5BPT is a pass-through module used to establish a direct connection between an input signal and the SCM5B series backplane analog bus. It has unity gain and no isolation. It accepts up to ±10V input and provides up to ±10V output.

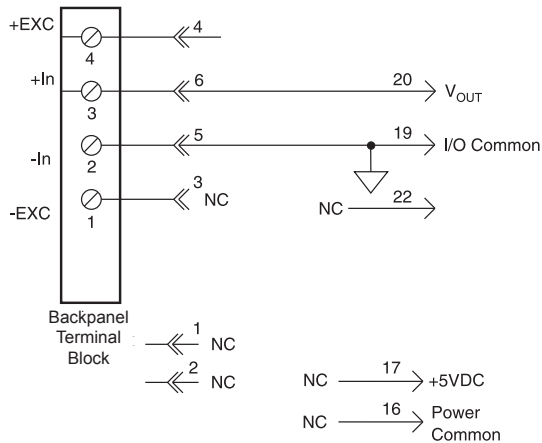

DESCRIPTION

The SCMXCJC is the identical circuit used on the SCMPB01/02/03/04/05/06/07 backpanels except it is packaged as a component for use in customer-designed mounting boards (Figure 3). When interfaced to an SCM5B37 or SCM5B47 module the transfer function of the voltage across the +SEN and -SEN pins is $V_{CJC} = 0.510 - 0.0025 (T - 25)V$.

Specifications

Accuracy	+25°C	±0.25°C
	+5°C to +45°C	±0.5°C
	-40°C to +85°C	±1.25°C

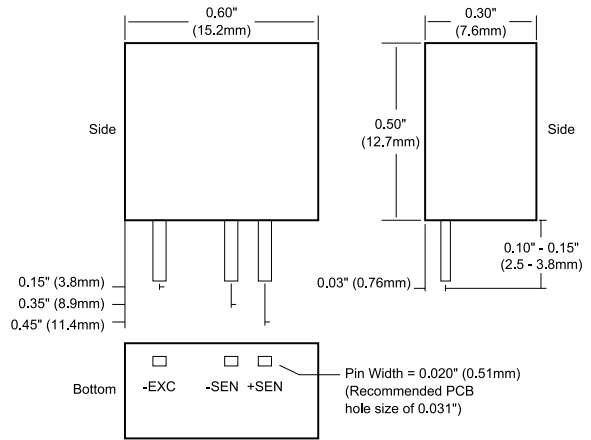


Figure 3: SCMXCJC Physical Dimensions and Pin Layout

SCM5BPT-1367
Pass-thru Module with Switch



DESCRIPTION

The SCM5BPT-1367 is a pass-through module used to establish a direct connection between an input signal and the SCM5B series backplane analog bus. It has unity gain, no isolation, and a logic controlled output switch which allows sharing of a common analog bus with other SCM5B modules. It accepts up to ±10V input and provides up to ±10V output. Resettable fuses and over voltage protection circuitry protect computer-side electronics.

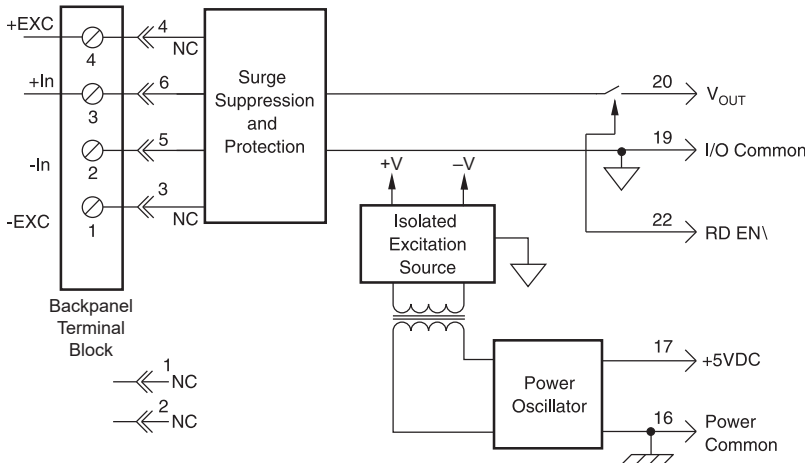


Figure 2: SCM5BPT-1367 Pass-thru Module with Switch Functional Diagram

SCMXJP-003

Jumper Strap

DESCRIPTION

Package of 10 jumpers for connecting adjacent input/output modules on the SCMPB01 backpanel. This connection is made if it is desired to direct the output of any input module to the input of an adjacent output module. The jumpers can also be used for configuring I/O addresses on the SCMPB02 backpanel.

SCMXRAIL1-XX, SCMXRAIL2-XX, SCMXRAIL3-XX

DIN-rail

DESCRIPTION

Three styles of DIN-rail are available. Specify length (-xx) in meters when ordering, -01 for 1 meter or -02 for 2 meter.

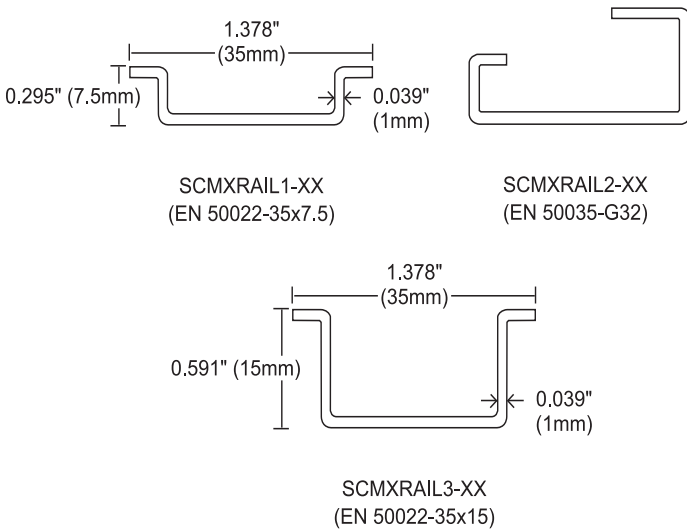


Figure 1: DIN-rail Styles

Ordering Information

Part Number	Description
SCMXRAIL1-XX	DIN EN 50022-35x7.5 (slotted steel)
SCMXRAIL2-XX	DIN EN 50035-G32 (slotted steel)
SCMXRAIL3-XX	DIN EN 50022-35x15 (slotted steel)

SCM5B-PROTO

Breadboard Kit

DESCRIPTION

The SCM5B-PROTO breadboard kit was designed to allow users to incorporate their own module functions using an SCM5B format. The kit includes a pc board designed for breadboard circuits, a module case, header, and mounting screw. Contact the factory for additional information.



Figure 2: SCM5B-PROTO Breadboard Kit.

SCMXR1

Current Conversion Resistor



DESCRIPTION

A precision 20Ω, 0.1%, 10ppm/°C resistor used with the SCM5B32 current-input module or SCM5B42 two-wire transmitter interface module. Sockets are provided on the SCMPB01/02/03/04/05/06/07 and SCM5B07 backpanels to allow installation of this resistor. One SCMXR1 is shipped with each SCM5B32 or SCM5B42 module.

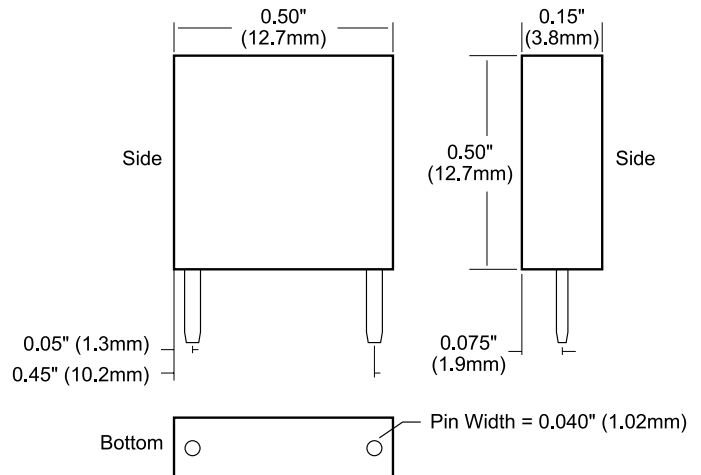


Figure 3: SCMXR1 Physical Dimensions

SCMXPRT-001/-001D, SCMXPRT-001/-001D

Power Supplies

DESCRIPTION

The SCMXPRT-001/-001D and SCMXPRT-001/-001D encapsulated power supplies are available in 120VAC or 220VAC input voltage ranges and provide 5VDC outputs suitable for all SCM5B modules. They are designed to mount on the SCMXRK-002 metal rack or DIN-rail EN 50022-35x7.5 (D versions). The supplies are UL-recognized. Their compact size and low weight are ideal for high-density applications.

Module	SCMXPRT-001/D	SCMXPRT-001/D
Input Voltage Range, 47Hz to 63Hz	105-125VAC	200-240VAC
Output Voltage	5VDC	5VDC
Output Current, +50°C	1A (derate 2.5%/°C above +50°C)	1A
Operating Temperature	-25°C to +71°C	-25°C to +71°C
Dielectric Withstand V (input to ground)	2500Vrms	2500Vrms
Line Regulation	±0.05%	±0.05%
Load Regulation	±0.15%	±0.15%
Output Ripple (max)	2mVrms	2mVrms
Overvoltage Protection	6.2V	6.2V
Weight	1.25 lbs (567g)	1.25 lbs (567g)

NOTES:

* Contact factory for maximum values.

Supplies are UL recognized, File No. E65890.

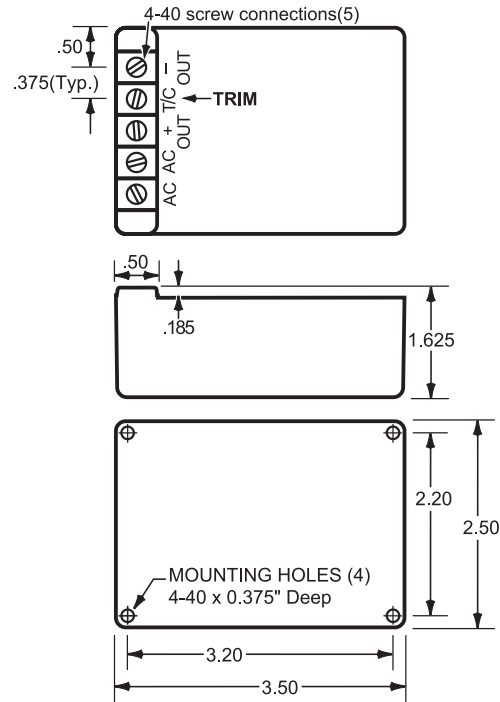


Figure 1: SCMXPRT-001/D and SCMXPRT-001/D Physical Dimensions

SCMXPRT-003, SCMXPRT-003

Power Supplies

DESCRIPTION

The SCMXPRT-003 and SCMXPRT-003 Linear Power Supplies are available in 120VAC or 220VAC input. They have sufficient output current capacity to supply any combination of SCM5B modules. The SCMXRK-002 metal rack provides mounting capability for the SCMXPRT-003 and SCMXPRT-003 power supplies.

Specifications Typical* at $T_A = +25^\circ\text{C}$

Module	SCMXPRT-003	SCMXPRT-003
Input Voltage Range, 47Hz to 63Hz	104-132VAC	207-265VAC
Output Voltage	5VDC ±1%	5VDC ±1%
Output Current (at +70°C)	3A	3A
Output Current (at +50°C)	6A	6A
Operating Temp	0 to +70°C	0 to +70°C
Dielectric Withstand Voltage (input to ground)	3750VAC	3750VAC
Line Regulation (10% line change)	±0.05%	±0.05%
Load Regulation (50% load change)	±0.05%	±0.05%
Output Ripple (max)	5mVp-p	5mVp-p
Overvoltage Protection (factory set)	6.2V ±0.4V	6.2V ±0.4V

NOTES:

* Contact factory for maximum values. Both supplies are tested and certified by TUV to VDE 0806 and IEC 380. They are UL recognized (File Number E55974) and CSA Certified (CSA File Number LR38879).

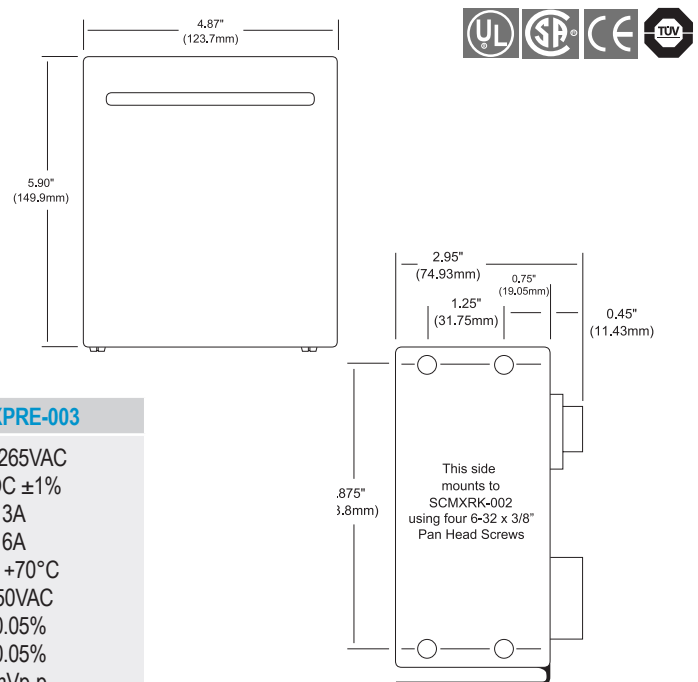


Figure 2: SCMXPRT-003/SCMXPRT-003 Physical Dimensions

PWR-4505



25W Single-output, Industrial, DIN-rail, Switching Power Supply

Specifications Typical* at T_A = +25°C

Module	PWR-4505
Input	85 to 264VAC, 120 to 370VDC
Frequency	47 to 63Hz
Input Current	1.5A/115VAC, 0.75A/230VAC
Inrush Current	Cold Start 30A/115VAC, 60A/230VAC
Efficiency	72%
Output Voltage and Current Rating	5V, 5A
Temperature Coefficient	±0.03%/°C
Ripple Voltage	100mVp-p
Overload Protection	105 to 150% Rated Output Power
Over Voltage Protection	5.75 to 6.75V
Over Temperature Protection	135°C Detect on Heatsink of Power Transistor
Dielectric Strength	Between Input and Output Terminals: 3kV, 1 Minute Between Input and FG: 1.5kV, 1 Minute Between Output and FG: 0.5kV, 1 Minute
Insulation Resistance	Between Input and Output Terminals/Input and FG/Output and FG: 100MΩ/500VDC
Operating Temperature	-10°C to +50°C
Storage Temperature	-20°C to +85°C
Relative Humidity	10 to 95%
Mechanical Dimensions (h)x(w)x(d)	3.66" x 3.07" x 2.24" (93mm x 78mm x 57mm)
Terminal Screw	M3

FEATURES

- Universal AC Input (85 to 264VAC)
- DC Compatible Input (120 to 370VDC)
- Protections: Short Circuit, Overload, Over Voltage, Over Temperature
- Mounts on DIN-rail TS-35/7.5 and 15
- Approvals: UL, CUL, TUV, CB, CE
- CE Compliant, UL 508 Listed
- TUV EN60950-1 Approved
- Compliant with EMC Directive EN50082-2
- LED Indicator for Power On

NOTES:

* Contact factory for maximum values.

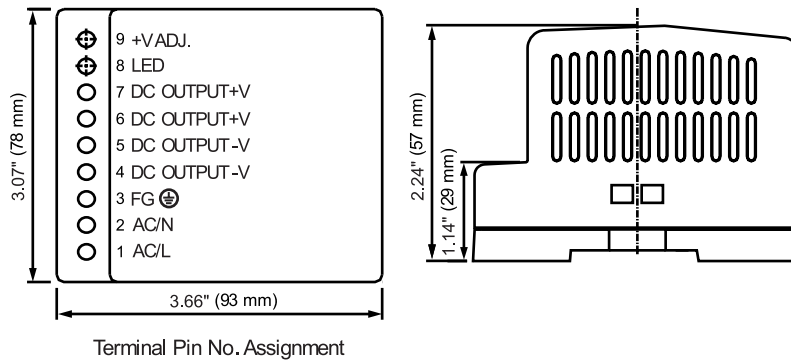


Figure 1: PWR-4505 Physical Dimensions