

## SCM7B21/30/31







# **DESCRIPTION**

Each SCM7B21/30/31 voltage input module accepts one channel of analog voltage input which is filtered, isolated, amplified, and converted to a high-level analog voltage for output to the process control system.

Isolated Analog Voltage-input Modules

These modules incorporate a five-pole filtering approach to maximize both time and frequency response by taking advantage of both Thomson (Bessel) and Butterworth characteristics. One pole of the filter is on the field side of the isolation barrier; four are on the process control system side.

After the initial field-side filtering, the input signal is chopped by a proprietary chopper circuit and transferred across the transformer isolation barrier, suppressing transmission of common mode spikes and surges. The signal is then reconstructed and filtered for process control system output.

Modules accept a wide 14 - 35VDC power supply range (+24VDC nominal). Their compact packages (2.13"x1.705"x0.605") save space and are ideal for high channel density applications. They are designed for easy DIN-rail mounting using any of the -DIN backpanels.

#### **FEATURES**

- Accepts Millivolt and Voltage Level Signals
- Provides High-level Voltage-outputs
- 1500Vrms Transformer Isolation
- Accuracy, ±0.03% of Span (typ), ±0.1% (max)
- ANSI/IEEE C37.90.1 Transient Protection
- Input Protected to 120Vrms. Continuous


- Noise, 500µVp-p (5MHz), 250µVrms (100kHz)
- Up to 160dB CMRR
- 85dB NMR at 60Hz, 80dB at 50Hz
- · Easy DIN-rail Mounting
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III **Directive 2015/863**

#### **BENEFITS**

- Small Form-factor for **High-density Applications**
- · Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- · Reduces Electrical Noise in Measured Signals
- Convenient System Expansion and Repair
- Signal Filtering in Noisy Environments
- Simplifies Sensor Interface and Signal Conditioning Design
- Provides Isolation of External Sensors
- Breaks Ground Loops
- Reduces EMC Concerns

#### **APPLICATIONS**

- · Analog Signal Conditioning
- Industrial Process Control
- Test and Measurement
- · System and Signal Monitoring
- Temperature Measurement
- Torque Measurement
- Civil Engineering
- · Geotechnical Monitoring

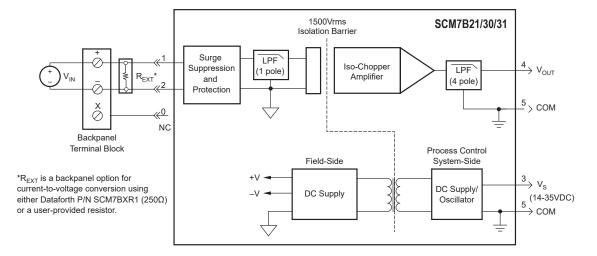

SCM7B21/30/31 Block Diagram - For Module Dimensions and Pinouts, See Page 2-26



### **Specifications** Typical\* at T<sub>A</sub> = + 25°C and +24VDC

Module	SCM7B21	SCM7B30	SCM7B31
Input Signal Range Bias Current Resistance Normal Power Off Overload	±10V ±0.1nA 2MΩ (min) 2MΩ (min) 2MΩ (min)	See Table** $\pm 0.5 nA$ $50 M\Omega$ $30 k\Omega$ (min) $30 k\Omega$ (min)	See Table** ±0.05nA 500kΩ (min) 500kΩ (min) 500kΩ (min)
Protection Continuous Transient	120Vrms (max) ANSI/IEEE C37.90.1	120Vrms (max) ANSI/IEEE C37.90.1	120Vrms (max) ANSI/IEEE C37.90.1
Output Signal Range <sup>(1)</sup> Effective Available Power <sup>(1)</sup> Resistance Protection Voltage/Current Limit	±10V 10mW <1Ω Continuous Short-to-Ground ±12V, ±14mA	† 40mW <1Ω Continuous Short-to-Ground ±12V, ±14mA	† 40mW <1Ω Continuous Short-to-Ground ±12V, ±14mA
CMV (Input-to-Output) Continuous Transient CMRR (50 or 60Hz)	1500Vrms ANSI/IEEE C37.90.1 100dB	1500Vrms ANSI/IEEE C37.90.1 160dB	1500Vrms ANSI/IEEE C37.90.1 120dB
Accuracy <sup>(2)</sup> Linearity <sup>(3)</sup> Stability (–40°C to +85°C)	±0.03% Span (typ) ±0.1% Span (max) ±0.01% Span (typ) ±0.02% Span (max)	±0.03% Span (typ) ±0.1% Span (max) ±0.01% Span (typ) ±0.02% Span (max)	±0.03% Span (typ) ±0.1% Span (max) ±0.01% Span (typ) ±0.02% Span (max)
Gain Input Offset Zero Suppression Output Offset Noise	±55ppm/°C N/A <sup>(4)</sup> N/A ±0.001% Span/°C	$\pm 35 \text{ppm/}^{\circ}\text{C}$ $\pm 0.5 \mu \text{V/}^{\circ}\text{C}$ $\pm 0.005 \% (\text{V}_{\text{Z}})^{(5)} ^{\circ}\text{C}$ $\pm 0.002 \% \text{ Span/}^{\circ}\text{C}$	$\pm 55$ ppm/°C $\pm 5$ $\mu$ V/°C $\pm 0.005\%(V_Z)^{(5)}$ /°C $\pm 0.002\%$ Span/°C
Peak at 5MHz B/W RMS at 10Hz to 100kHz B/W Peak at 0.1Hz to10Hz B/W	1mV 250μV 1μV RTI <sup>(6)</sup>	500μV 250μV 1μV RTI <sup>(6)</sup>	500μV 250μV 1μV RTI <sup>(6)</sup>
Frequency and Time Response Bandwidth, –3dB NMR (50/60Hz) Step Response, 90% Span	300Hz 80dB per Decade above 300Hz 1.5ms	3Hz 80/85dB 165ms	3Hz 80/85dB 165ms
Supply Voltage Current <sup>(1)</sup> Sensitivity	14 - 35VDC 16mA ±0.0002%/%V <sub>s</sub>	14 - 35VDC 12mA ±0.0001%/%V <sub>s</sub>	14 - 35VDC 12mA ±0.0001%/%V <sub>s</sub>
Mechanical Dimensions (h)x(w)x(d)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)	2.13" x 1.705" x 0.605" (54.1mm x 43.3mm x 15.4mm)
Environmental Operating Temperature Range Storage Temperature Range Relative Humidity Emissions EN61000-6-4 Radiated, Conducted Immunity EN61000-6-2 RF ESD, EFT	-40°C to +85°C -40°C to +85°C 0 to 95% Noncondensing ISM, Group 1 Class A ISM, Group 1 Performance A ±0.5% Span Error Performance B	-40°C to +85°C -40°C to +85°C 0 to 95% Noncondensing ISM, Group 1 Class A ISM, Group 1 Performance A ±0.5% Span Error Performance B	-40°C to +85°C -40°C to +85°C 0 to 95% Noncondensing ISM, Group 1 Class A ISM, Group 1 Performance A ±0.5% Span Error Performance B

- \*Contact factory or your local Dataforth sales office for maximum values.
- (1) Output Range and Supply Current specifications are based on minimum output load resistance. Minimum output load resistance is calculated by  $V_{\text{OUT}}^{2}/P_{\text{E}}$ , where  $P_{\text{E}}$  is the Output Effective Available Power that guarantees output range, accuracy, and linearity specifications.
- (2) Accuracy includes the effects of repeatability, hysteresis, and linearity.
- (3) Linearity is calculated using the best-fit straight line method.
- (4) Input offset term included in output offset specification.
- (5) V<sub>2</sub> is the nominal input voltage that results in a 0V output.
- (6) RTI = Referenced to Input.
- (7) SCM7B21 is available only as ±10V output.

#### \*\*Ordering Information

Model	Input Range
SCM7B21 <sup>(7)</sup>	±10V
SCM7B30-01 SCM7B30-02 SCM7B30-03 SCM7B30-05 SCM7B30-06 SCM7B30-07 SCM7B30-08	0 to +10mV 0 to +100mV 0 to +1V +1V to +5V ±10mV ±100mV ±1V
SCM7B31-01 SCM7B31-02 SCM7B31-03 SCM7B31-04 SCM7B31-05 SCM7B31-06 SCM7B31-07 SCM7B31-08	0 to +10V ±5V ±10V 0 to +5V 0 to +20V ±20V 0 to +50V ±50V

#### †Output Ranges Available

Output Range	Part No. Suffix	Example
+1V to +5V	NONE	SCM7B30-01
0 to +5V	Α	SCM7B30-01A
0 to +10V	D	SCM7B30-01D