


## DSCA47



### Linearized Thermocouple-input Signal Conditioners

#### DESCRIPTION

Each DSCA47 thermocouple-input module provides a single channel of thermocouple-input which is filtered, isolated, amplified, linearized, and converted to a high-level voltage output (Figure below). Signal filtering is accomplished with a five-pole filter which provides 85dB of normal-mode rejection at 60Hz and 80dB at 50Hz. An anti-aliasing pole is located on the field side of the isolation barrier, and the other four poles are on the system side. After the initial field-side filtering, the input signal is chopped by a proprietary chopper circuit. Isolation is provided by transformer coupling, again using a proprietary technique to suppress transmission of common-mode spikes or surges.

The DSCA47 can interface to eight industry standard thermocouple types: J, K, T, E, R, S, B and N. Each module has cold junction compensation to correct for parasitic thermocouples formed by the thermocouple wire and input screw terminals on the module. Upscale open thermocouple detection is provided by internal circuitry. Downscale indication can be implemented by installing a 47MW,  $\pm 20\%$  resistor between screw terminals 6 and 8 on the input terminal block.

Module output is either voltage or current. For current output models a dedicated loop supply is provided at terminal 3 (+OUT) with loop return located at terminal 4 (-OUT). The system-side load may be either floating or grounded.

Special input circuits provide protection against accidental connection of power-line voltages up to 240VAC and against transient events as defined by ANSI/IEEE C37.90.1. Protection circuits are also present on the signal output and power input terminals to guard against transient events and power reversal. Power lines are secured to the module using screw terminals which are in pluggable terminal blocks for ease of system assembly and reconfiguration.

The modules have excellent stability over time and do not require recalibration; however, zero and span settings are adjustable up to  $\pm 3\%$  to accommodate situations where fine-tuning is desired. The adjustments are made using potentiometers located under the front panel label and are non-interactive for ease of use.

#### FEATURES


- Interfaces to Types J, K, T, E, R, S, B, and N Thermocouples
- Wide Supply Voltage Range
- Linearizes Thermocouple Signal
- 160dB CMR
- Industry-standard Output of 0 to +10V, 0-20mA, or 4-20mA
- 85dB NMR at 60Hz, 80dB at 50Hz
- 1500Vrms Transformer Isolation
- $\pm 0.08\%$  Accuracy
- ANSI/IEEE C37.90.1 Transient Protection
- Easily Mounts on Standard DIN-rail
- Input Protected to 240VAC Continuous
- UL/cUL Listed
- True 3-way Isolation
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

#### BENEFITS

- Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- Signal Filtering in Noisy Environments
- Reduces Electrical Noise in Measured Signals
- Simplifies Sensor Interface and Signal Conditioning Design
- Convenient System Expansion and Repair
- Provides Isolation of External Sensors
- Reduces EMC Concerns
- Breaks Ground Loops

#### APPLICATIONS

- Analog Signal Filtering
- Temperature Measurement
- Industrial Process Control
- Torque Measurement
- Test and Measurement
- Civil Engineering
- System and Signal Monitoring
- Geotechnical Monitoring

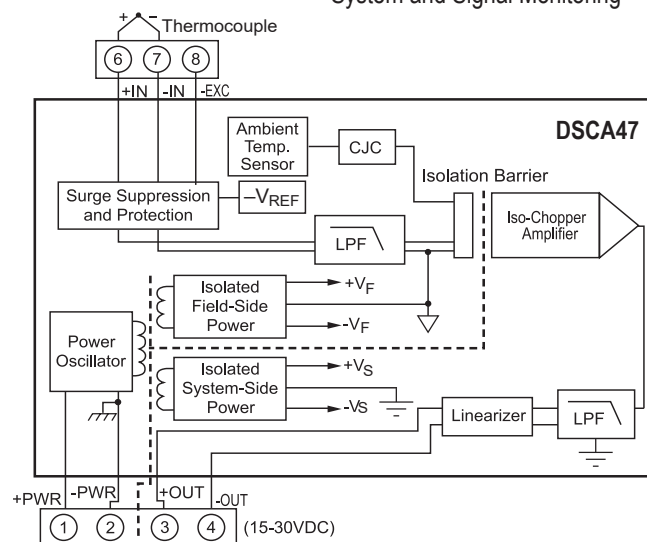

DSCA47 Block Diagram - [For Module Dimensions and Pinouts, See Page 4-35](#)

**Specifications** Typical\* at T<sub>A</sub> = +25°C and +24VDC Supply Voltage

Module	DSCA47
Input Range	Standard Thermocouple Temperature Limits as Per Nist Monograph 175, ITS-90 -30nA
Input Bias Current	
Input Resistance	50MΩ
Normal	65kΩ
Power Off	65kΩ
Overload	
Input Protection	240Vrms (max) ANSI/IEEE C37.90.1
Continuous	
Transient	
Cold Junction Compensation	±0.5°C ±1.25°C
Accuracy, +5°C to +45°C	
Accuracy, -40°C to +80°C	
Output Range	See Ordering Information
Load Resistance (I <sub>OUT</sub> )	600Ω
Current Limit	8mA (V <sub>OUT</sub> ), 30mA (I <sub>OUT</sub> )
Output Protection	Continuous ANSI/IEEE C37.90.1
Short to Ground	
Transient	
CMV, Input to Output, Input to Power	1500Vrms (max) ANSI/IEEE C37.90.1
Continuous	
Transient	
CMV, Output to Power	50VDC (max) 160dB
Continuous	
CMR (50Hz or 60Hz)	
Accuracy	See Ordering Information Below
Adjustability	±3% Zero and Span
Stability	
Input Offset	±0.5μV/°C
Output Offset	±6ppm/°C (V <sub>OUT</sub> ), ±20ppm/°C (I <sub>OUT</sub> )
Gain	±40ppm/°C
Output Noise, 100kHz Bandwidth	250μVrms (V <sub>OUT</sub> ), 1μArms (I <sub>OUT</sub> )
Bandwidth, -3dB	3Hz
NMR	95dB at 60Hz, 85dB at 50Hz
Response Time, 90% Span	165ms
Open Input Response	Upscale
Open Input Detection Time	<5s
Power Supply	
Voltage	15 to 30VDC
Current	25mA (V <sub>OUT</sub> ), 55mA (I <sub>OUT</sub> )
Sensitivity	±0.0001%/%
Protection	Continuous ANSI/IEEE C37.90.1
Reverse Polarity	
Transient	
Mechanical Dimensions (h)x(w)x(d)	2.95" x 0.89" x 4.13" (75mm x 22.5mm x 105mm)
Mounting	DIN EN 50022 -35x7.5 or -35x15 rail
Environmental	
Operating Temperature Range	-40°C to +80°C
Storage Temperature Range	-40°C to +80°C
Relative Humidity	0 to 95% Noncondensing
Emissions EN61000-6-4	ISM, Group 1
Radiated, Conducted	Class A
Immunity EN61000-6-2	ISM, Group 1
RF	Performance A ±0.5% Span Error
ESD, EFT	Performance B

**NOTES:**

\*Contact factory or your local Dataforth sales office for maximum values.

(1) Includes conformity, hysteresis, repeatability, and CJC error.

**Installation Notes:**

- 1.) This Equipment is Suitable for Use in Class I, Division 2, Groups A, B, C, D, or Non-hazardous Locations Only.
- 2.) WARNING - Explosion Hazard - Substitution of Components May Impair Suitability for Class I, Division 2.
- 3.) WARNING - Explosion Hazard - Do Not Disconnect Equipment Unless Power Has Been Switched Off or the Area is Known to be Non-hazardous.
- 4.) The Power to These Devices Shall Be Limited by an Over-current Protection Device, UL Certified Fuse (JDYX/JDYX2) Rated 6A (max).

**Ordering Information**

Model	TC Type <sup>‡</sup>	Input Range	Output Range <sup>†</sup>	Accuracy <sup>(1)</sup>
DSCA47J-01	J	0°C to +760°C (+32°F to +1400°F)	2, 3, 4	±0.08% ±0.61°C
DSCA47J-02	J	-100°C to +300°C (-148°F to +572°F)	2, 3, 4	±0.08% ±0.32°C
DSCA47J-03	J	0°C to +500°C (+32°F to +932°F)	2, 3, 4	±0.07% ±0.35°C
DSCA47K-04	K	0°C to +1000°C (+32°F to +1832°F)	2, 3, 4	±0.08% ±0.80°C
DSCA47K-05	K	0°C to +500°C (+32°F to +932°F)	2, 3, 4	±0.08% ±0.40°C
DSCA47K-13	K	-100°C to +1350°C (-148°F to +2462°F)	2, 3, 4	±0.08% ±1.16°C
DSCA47K-14	K	0°C to +1200°C (+32°F to +2192°F)	2, 3, 4	±0.08% ±0.96°C
DSCA47T-06	T	-100°C to +400°C (-148°F to +752°F)	2, 3, 4	±0.16% ±0.80°C
DSCA47T-07	T	0°C to +200°C (+32°F to +392°F)	2, 3, 4	±0.13% ±0.26°C
DSCA47E-08	E	0°C to +1000°C (+32°F to +1832°F)	2, 3, 4	±0.10% ±1.00°C
DSCA47R-09	R	+500°C to +1750°C (+932°F to +3182°F)	2, 3, 4	±0.10% ±1.25°C
DSCA47S-10	S	+500°C to +1750°C (+932°F to +3182°F)	2, 3, 4	±0.10% ±1.25°C
DSCA47B-11	B	+500°C to +1800°C (+932°F to +3272°F)	2, 3, 4	±0.15% ±1.95°C
DSCA47N-15	N	-100°C to +1300°C (-148°F to +2372°F)	2, 3, 4	±0.08% ±1.12°C

**†Output Ranges Available**

Output Range	Part No. Suffix	Example
1. -10V to +10V	NONE	N/A
2. 0V to +10V	NONE	DSCA47J-01
3. 4-20mA	C	DSCA47J-01C
4. 0-20mA	E	DSCA47J-01E
5. 0 to +5V	A	N/A
6. 0 to 1mA	B	N/A

**‡Thermocouple Alloy Combinations**

Standards: DIN IEC 584, ANSI MC96-1-82, JIS C 1602-1981

Type	Material
J	Iron vs. Copper-nickel
K	Nickel-chromium vs. Nickel-aluminum
T	Copper vs. Copper-nickel
E	Nickel-chromium vs. Copper-nickel
R	Platinum-13% Rhodium vs. Platinum
S	Platinum-10% Rhodium vs. Platinum
B	Platinum-30% Rhodium vs. Platinum-6% Rhodium
N	Nickel-14.2% Chromium-1.4% Silicon vs. Nickel-4.4% Silicon- 0.1% Magnesium