

# SCM5B39



## Current-output Modules

### DESCRIPTION

Each SCM5B39 current-output module provides a single channel of analog output. The track-and-hold circuit in the input stage can be operated in a hold mode where one DAC can supply many output modules, or a track mode where one DAC is dedicated to each module. In addition to the track-and-hold circuit, each module provides signal buffering, isolation, filtering, and conversion to a high-level current output (Figure below).

Setting of the track or hold mode is controlled by the logic state of WR EN $\bar{1}$ , module pin 23. When pin 23 is low, the track mode is enabled. If pin 23 is high, the hold mode is enabled. The module is designed with a completely isolated computer-side circuit which can be floated to  $\pm 50V$  from Power Common, pin 16. This complete isolation means that no connection is required between I/O Common and Power Common for proper operation of the track and hold circuit. For a low state, simply connect pin 23, the Write-Enable pin, to I/O Common, pin 19.

The SCMPB02 and SCMPB06 backpanels allow host computer control of the WR EN $\bar{1}$  control line, which allows multiplexing of one host DAC to up to 64 SCM5B39 output modules. During power-up, the output remains at 0mA for 100ms on all models except the SCM5B39-07, which allows the track-and-hold circuit to be initialized.

A special circuit in the output stage of the module provides protection against accidental connection of power-line voltages up to 240VAC on all models.

### FEATURES


- Accepts High-level Voltage or Process Current Input
- Unipolar or Bipolar Current Output
- 1500Vrms Transformer Isolation
- ANSI/IEEE C37.90.1 Transient Protection
- Output Protected to 240VAC, Continuous
- 110dB CMR
- 400Hz Signal Bandwidth
- $\pm 0.03\%$  Accuracy
- $\pm 0.005\%$  Linearity
- CSA C/US Certified
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863
- Mix and Match SCM5B Types on Backpanel

### BENEFITS

- Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- Reduces EMC Concerns and Electrical Noise in Measured Signals
- Convenient System Expansion and Repair
- Signal Filtering in Noisy Environments
- Simplifies Sensor Interface and Signal Conditioning Design
- Provides Isolation of External Sensors
- Breaks Ground Loops

### APPLICATIONS

- Analog Signal Conditioning
- Analog Signal Isolation
- Analog Signal Filtering
- Industrial Process Control
- Test and Measurement
- Temperature Measurement

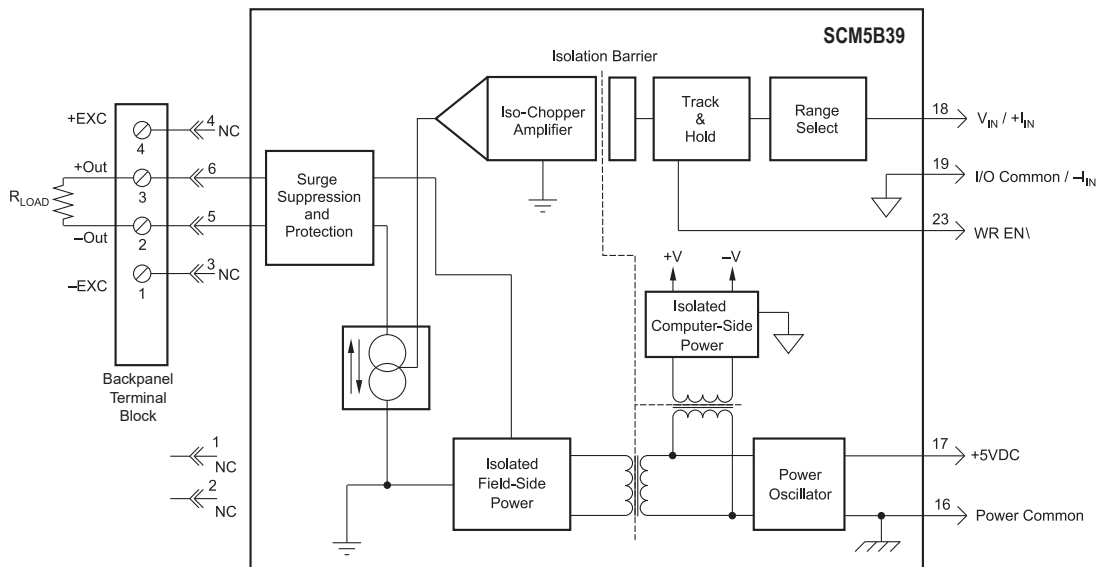

SCM5B39 Block Diagram [For Module Dimensions and Pinouts, See Page 1-44](#)

**Specifications** Typical\* at T<sub>A</sub> = +25°C and +5VDC Power

Module	Unipolar Output Current SCM5B39-01,-02,-03,-04,-05	Bipolar Output Current SCM5B39-07
Input Voltage Range	±5V or 0V to +5V	±10V
Input Current Range (-05)	0-20mA	N/A
Input Voltage (max)	±36V (no damage)	*
Input Current (max) (-05)	75mA (no damage)	N/A
Input Resistance	50MΩ	2MΩ
Input Resistance (-05)	250Ω	N/A
Output Current Range	0-20mA or 4-20mA	±20mA
Power-Up Delay <sup>(1)</sup>	100ms	N/A
Current Out	0mA	N/A
Over Range Capability	10%	10%
Output Compliance Voltage (Open Circuit)	22VDC	±15VDC
Load Resistance Range	0 to 650Ω (0 to 750Ω for Power Supply Voltage Greater than 4.95VDC)	0 to 450Ω (0 to 500Ω for Power Supply Voltage Greater than 4.95VDC)
Output I Under Fault (max)	26mA	26mA
Output Protection		
Continuous	240Vrms (max)	240Vrms (max)
Transient	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
CMV, Output to Input		
Continuous	1500Vrms (max)	1500Vrms (max)
Transient	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
CMR (50Hz or 60Hz)	110dB	110dB
NMR (-3dB)	80dB per Decade Above 400Hz	80dB per Decade Above 275Hz
Accuracy	±0.03% Span	±0.05% Span
Linearity	±0.005% Span	±0.03% Span
Stability		
Offset	±0.5μA/°C	±0.5μA/°C
Gain	±20ppm/°C	±40ppm/°C
Noise		
Output Ripple, 100kHz	10μAp-p	10μAp-p
Bandwidth, -3dB	400Hz	275Hz
Rise Time, 10 to 90% Span	1.0ms	1.2ms
Sample and Hold		
Output Droop Rate	40μA/s	40μA/s
Acquisition Time	50μs	50μs
Track-and-Hold Enable Control		
Max Logic "0"	+0.8V	+0.8V
Min Logic "1"	+2.4V	+2.4V
Max Logic "1"	+36V	+36V
Input Current "0"	0.5μA	0.5μA
Power Supply Voltage	+5VDC ±5%	+5VDC ±5%
Power Supply Current	170mA	130mA
Power Supply Sensitivity	±0.5μA/% (typ)	±0.5μA/% (typ)
Mechanical Dimensions (h)x(w)x(d)	2.28" x 2.26" x 0.6" (58mm x 57mm x 15mm)	2.28" x 2.26" x 0.6" (58mm x 57mm x 15mm)
Environmental		
Operating Temp. Range	-40°C to +85°C	-40°C to +85°C
Storage Temp. Range	-40°C to +85°C	-40°C to +85°C
Relative Humidity	0 to 95% Noncondensing	0 to 95% Noncondensing
Emissions EN61000-6-4 Radiated, Conducted	ISM, Group 1 Class A	ISM, Group 1 Class A
Immunity EN61000-6-2 RF	ISM, Group 1	ISM, Group 1
ESD, EFT	Performance A ±0.5% Span Error Performance B	Performance A ±0.5% Span Error Performance B

**NOTES:**

\*Contact factory for maximum values.

(1) See Product Description for further details.

**Ordering Information**

Model	Input Range	Output Range	Bandwidth
SCM5B39-01	0V to +5V	4-20mA	400Hz
SCM5B39-02	-5V to +5V	4-20mA	400Hz
SCM5B39-03	0V to +5V	0-20mA	400Hz
SCM5B39-04	-5V to +5V	0-20mA	400Hz
SCM5B39-05	0-20mA	0-20mA	400Hz
SCM5B39-07	-10V to +10V	±20mA	275Hz

Refer to SCM5B392 specifications for additional current-output models.